

Threading


HSS

Combination Drill & Taps

WORKING THICKNESS up to 3.5mm thick




Lubricant is recommended when cutting metals

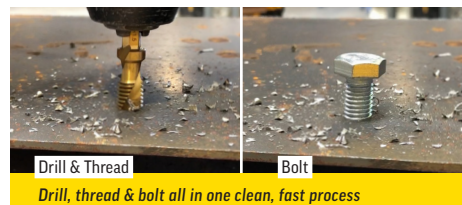

Drill & Thread

Bolt

Drill, thread & bolt all in one clean, fast process

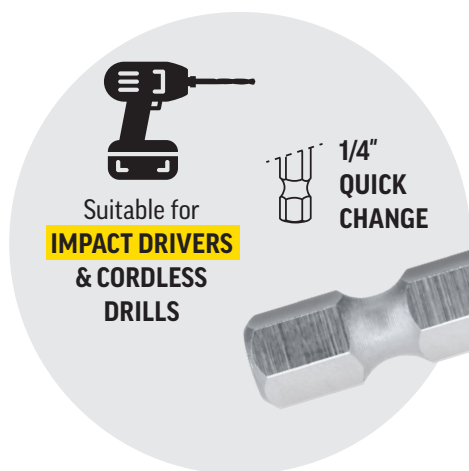

Suitable for
**IMPACT DRIVERS
& CORDLESS
DRILLS**

1/4"
**QUICK
CHANGE**

Titanium nitride coating
reduces heat & increases lubricity
for extended life

New

135° Split Point
cuts faster & reduces wandering

Drill, tap & deburr ferrous
& non-ferrous metals
in one operation up to 3.5mm

Fully ground M2 HSS
raw material for extended life



23 PCE Hex Drill Set

CONTAINS:

13 x Combination Drill & Taps

Metric Coarse: M3 – M10

UNC: 6G – 12G & 1/4" – 3/8"

12 x IMPACT Hex Drive Drill Bits

2.0 – 6.5mm

Sturdy plastic storage case

Code: CDT25PB



CARDED

METRIC COARSE

Ø	CARDED 1 PCE
3.0	DTMC030
4.0	DTMC040
5.0	DTMC050
6.0	DTMC060
8.0	DTMC080
10.0	DTMC100

UNC

Ø	CARDED 1 PCE
6G	DTUNC6G
8G	DTUNC8G
10G	DTUNC10G
12G	DTUNC12G
1/4"	DTUNC14
5/16"	DTUNC516
3/8"	DTUNC38

Also available: C.D.T Cutting Lubricant – formulated for extreme cutting performance when tapping, drilling or reaming into all metals. code: ATL005

©COPYRIGHT SHEFFIELD GROUP 2020. No part of this publication may be copied, scanned or reproduced in whole or part in any form without written permission from Sheffield Group.