

## Machine Screw

**Head Style:** Countersunk Head

**Drive Type:** Phillips


**Thread Type:** Metric - Coarse

**Material:** Stainless Steel

**Class Grade:** A2-70 G304

**Corrosion Protection Level:** Excellent

**Standard:** DIN 965 (H)

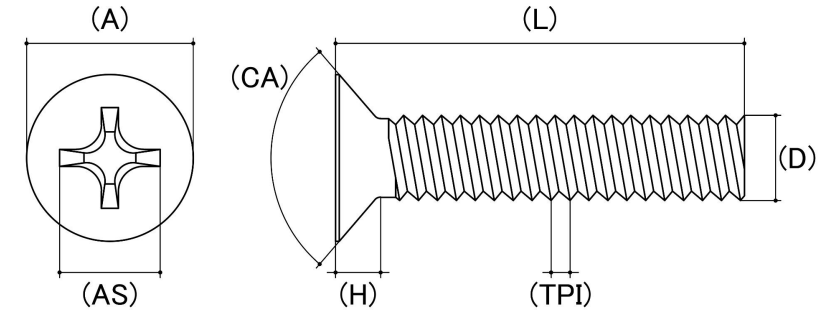

*Cad Drawings shown for graphic representation only.\**

Size	Thread Pitch (mm)	Thread Type	Product Diameter (D) (mm)		Head Diameter (A) (mm)		Head Height (H) (mm)	Countersunk Angle	Driver Bit Size (AS)	sku (Part Number)
			Min	Max	Min	Max	Nom			
M1.6	0.40mm	Coarse	1.49	1.58	2.75	3.00	0.96	90°	PH0	21CS16
M2	0.40mm	Coarse	1.88	1.98	3.50	3.80	1.20	90°	PH1	21CS2
M2.5	0.40mm	Coarse	2.38	2.48	4.40	4.70	1.50	90°	PH1	21CS25
M3	0.50mm	Coarse	2.87	2.98	5.30	5.60	1.65	90°	PH1	21CS3
M3.5	0.60mm	Coarse	3.38	3.48	6.50	7.00	1.95	90°	PH2	21CS3.5
M4	0.70mm	Coarse	3.83	3.97	7.14	7.50	2.20	90°	PH2	21CS4
M5	0.80mm	Coarse	4.82	5.00	8.84	9.20	2.50	90°	PH2	21CS5
M6	1.00mm	Coarse	5.82	6.00	10.57	11.00	3.00	90°	PH3	21CS6
M8	1.25mm	Coarse	7.78	8.00	14.07	14.50	4.00	90°	PH4	21CS8

**Disclaimer:**

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

\* Cad Drawings may not reflect diameter, thread length or overall length.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 01 May 2024