

Socket Allen Screw

Head Style: Countersunk Head

Drive Type: Internal Hex


Thread Type: Metric - Coarse

Material: Stainless Steel

Class Grade: A4-70 G316

Corrosion Protection Level: Ultimate

Standard: DIN 7991

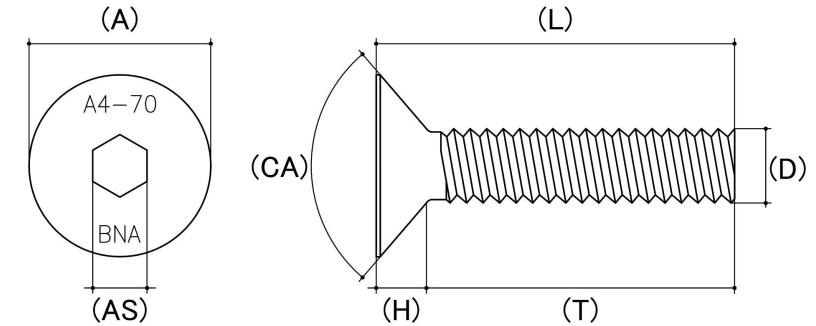

*CAD drawings shown for graphic representation only.**

| Size | Thread Pitch (mm) | Thread Type | Product Diameter (D) (mm) | | Head Diameter (A) (mm) | | Head Height (H) (mm) | | Driver Bit Size (AS) (mm) | sku (qfind) |
|------|-------------------|-------------|---------------------------|-------|------------------------|-------|----------------------|------|---------------------------|-------------|
| | | | Min | Max | Min | Max | Min | Max | Nom | |
| M3 | 0.50 | Coarse | 2.87 | 2.98 | 5.54 | 6.00 | 1.96 | - | 2 | 31CS3M |
| M4 | 0.70 | Coarse | 3.83 | 3.97 | 7.53 | 8.00 | 2.48 | - | 2 | 31CS4M |
| M5 | 0.80 | Coarse | 4.82 | 5.00 | 9.43 | 10.00 | 3.44 | - | 3 | 31CS5M |
| M6 | 1.00 | Coarse | 5.82 | 6.00 | 11.34 | 12.00 | 3.72 | - | 4 | 31CS6M |
| M8 | 1.25 | Coarse | 7.78 | 8.00 | 15.24 | 16.00 | 4.96 | - | 5 | 31CS8M |
| M10 | 1.50 | Coarse | 9.78 | 10.00 | 19.22 | 20.60 | 6.20 | - | 6 | 31CS10M |
| M12 | 1.75 | Coarse | 11.73 | 12.00 | 23.12 | 24.00 | 7.44 | - | 8 | 31CS12M |
| M14 | 2.00 | Coarse | 13.73 | 14.00 | 26.48 | 27.00 | 7.50 | 8.10 | 10 | 31CS14M |

Disclaimer:

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

* CAD drawings may not reflect diameter, thread length or overall length.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 19 Mar 2024