

Sleeve Anchor

Head Style: Hex Flange Head


Material: Stainless Steel

Class Grade: A4-70 G316

Material Finish: Stainless Steel

Corrosion Protection Level: Ultimate

Internal External: External

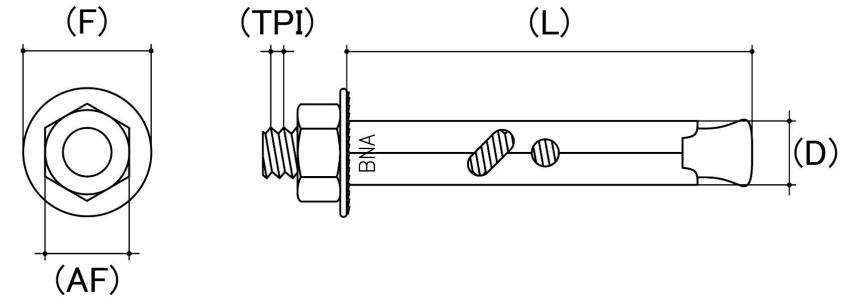

*Cad Drawings shown for graphic representation only.**

Size	Thread Size x Pitch	Length (L) (mm)	Flange Diameter (F) (mm)	Max Fast Thickness (G) (mm)	Drill Hole Depth (mm)	Drill Hole Size (mm)	Spanner Size (AS) (mm)	sku (Part Number)
M6.5	M5 x 0.80p	35	11	5	30	6	8mm	65SAS6535M
M6.5	M5 x 0.80p	55	11	15	40	6	8mm	65SAS6555M
M8	M6 x 1.00p	40	13	15	25	8	10mm	65SAS840M
M8	M6 x 1.00p	65	13	30	35	8	10mm	65SAS860M
M8	M6 x 1.00p	85	13	35	50	8	10mm	65SAS885M
M10	M8 x 1.25p	50	17	10	40	10	13mm	65SAS1050M
M10	M8 x 1.25p	75	17	20	55	10	13mm	65SAS1075M
M10	M8 x 1.25p	100	17	40	60	10	13mm	65SAS10100M
M12	M10 x 1.50p	60	17	20	40	12	15mm	65SAS1260M
M12	M10 x 1.50p	80	17	25	50	12	15mm	65SAS1280M
M12	M10 x 1.50p	100	17	40	60	12	15mm	65SAS12100M

Disclaimer:

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

* Cad Drawings may not reflect diameter, thread length or overall length.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 05 Aug 2024