Hook Eye Turnbuckle

Material: Stainless Steel


Class Grade: A4-70 G316

BOLT&NUT

Corrosion Protection Level: Ultimate

Comments: This product range is not rated and has no markings. Breaking load information provided is to be used as a guide only

AUSTRALIA | Fasteners | FASTENER | FKO |

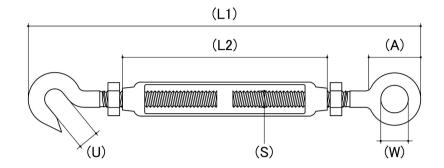

Cad Drawings shown for graphic representation only.*

Size	Thread Pitch (mm)	Thread Type	Length L (1) (mm)	Length L (2) (mm) Nom	Length Unwound (mm) Nom	Inside Eye Width (W) (mm) Nom	Outside Diameter Of Eye (A) (mm) Nom	Inside Dia. of Hook (U) (mm) Nom	Breaking Load Kgs (Not Rated Guide only) Nom	sku (Part Number)
M5	0.80mm	Coarse	120.00	70.00	181.00	8.00	18.00	9.00	130	62TBSHE570M
M6	1.00mm	Coarse	160.00	90.00	229.00	10.00	22.00	10.00	350	62TBSHE690M
M8	1.25mm	Coarse	200.00	120.00	292.00	14.00	27.00	11.00	650	62TBSHE8120M
M10	1.50mm	Coarse	240.00	150.00	366.00	16.00	33.00	12.00	800	62TBSHE10150M
M12	1.75mm	Coarse	300.00	200.00	474.00	17.00	38.00	18.00	1400	62TBSHE12200M
M16	2.00mm	Coarse	390.00	250.00	619.00	26.00	54.00	25.00	-	62TBSHE16250M
M20	2.50mm	Coarse	510.00	300.00	679.00	28.00	63.00	28.00	-	62TBSHE20300M
Disclaimer: Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information. * Cad Drawings may not reflect diameter, thread length or overall length.										Ry Ltd. All rights reserved. Version: 23 Sep 2024