

Multigrip Pop Blind Rivet

Head Style: Dome Head


Shell Material: Aluminium

Stem Material: Steel Zinc Plated

Corrosion Protection Level: Moderate

Standard: DIN7337

Comments: When selecting the right rivet, start with hole size and grip range.

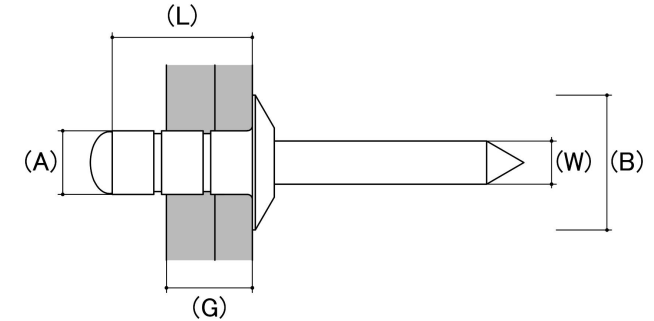

*Cad Drawings shown for graphic representation only.**

Industry Rivet Code	Rivet Diameter (A) (mm)	Head Diameter (B) (mm)	Shell Length (L) (mm)	Material Grip Range (G) (mm)		Stem Diameter (W) (mm)		Hole Size (mm)	sku (Part Number)
		Nom	Nom	Min	Max	Min	Max		
73 ASMG 4-3	3.20 (1/8)	6.00	8.00	0.60	4.70	1.70	2.00	3.30	73ASMG43
73 ASMG 4-5	3.20 (1/8)	6.00	11.00	4.80	8.00	1.70	2.00	3.30	73ASMG45
73 ASMG 4-6	3.20 (1/8)	6.00	13.50	8.00	9.50	1.70	2.00	3.30	73ASMG46
73 ASMG 5-4	4.00 (5/32)	8.00	10.50	1.00	6.40	2.10	2.50	4.10	73ASMG54
73 ASMG 5-6	4.00 (5/32)	8.00	13.50	6.40	9.00	2.10	2.50	4.10	73ASMG56
73 ASMG 6-4	4.80 (3/16)	9.20	10.50	1.60	6.40	2.50	2.90	4.90	73ASMG64
73 ASMG 6-6	4.80 (3/16)	9.20	16.00	6.40	8.00	2.50	2.90	4.90	73ASMG66
73 ASMG 6-8	4.80 (3/16)	9.20	18.00	8.00	11.00	2.50	2.90	4.90	73ASMG68
73 ASMG 6-10	4.80 (3/16)	9.20	21.00	11.00	14.00	2.50	2.90	4.90	73ASMG610
73 ASMG 6-12	4.80 (3/16)	9.20	25.00	14.00	19.00	2.50	2.90	4.90	73ASMG612

Disclaimer:

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

* Cad Drawings may not reflect diameter, thread length or overall length.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 31 Oct 2024