Countersunk Head Nutsert

Body Type: Half Hex Open **Outside Body**: Smooth

Thread Type: Metric - Coarse Body Material: Low Carbon Steel


Finish: Zinc Plated

Corrosion Protection Level: Moderate

Comments: Before installing check that your Tool capabilities cover required size

and material. We recommend using a paste on the mandrel thread to prolong

mandrel life

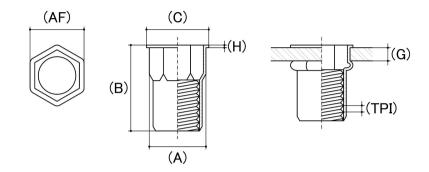

Cad Drawings shown for graphic representation only.*

Size	Thread Pitch (mm)	Thread Type	Material Grip Range (G) (mm)		Overall Nut Height (B) (mm)	Head Diameter (C) (mm)	Nut Width (A) (mm)	Flange Thickness (H) (mm)	Hex Hole (AF) (mm)	Recommended Hole Size (mm)	Pull Out (KN)	Push Out (KN)	Torque To Turn (NM)	sku (Part Number)
			Min	Max	Nom	Nom	Nom	Nom	Nom					
МЗ	0.50mm	Coarse	0.50	1.50	9.30	6.00	4.90	0.50	5.00	5.00	3	1	2	43CHH3SM
M4	0.70mm	Coarse	0.50	2.00	10.50	6.80	5.90	0.40	6.00	6.00	5	1	4	43CHH4SM
M5	0.80mm	Coarse	0.50	3.00	11.70	8.00	6.90	0.50	7.00	7.00	5	1	6	43CHH5SM
M6	1.00mm	Coarse	0.50	3.00	14.50	10.00	8.90	0.50	9.00	9.00	10	1	9	43CHH6SM
M8	1.25mm	Coarse	0.50	3.00	16.50	12.00	10.90	0.50	11.00	11.00	12	1	24	43CHH8SM
M10	1.50mm	Coarse	0.50	3.50	20.00	14.00	12.90	0.80	13.00	13.00	28	2	39	43CHH10SM

Disclaimer:

Dimensional data and technical information was obtained from publically available

sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only:

where discrepancies are found they are subject to change without notice. Bolt & Nut Australia

makes no warranties or representations regarding the accuracy and validity of the compiled information and data.

Contact the relevant standard authorities for accurate and detailed information.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 30 Apr 2025

^{*} Cad Drawings may not reflect diameter, thread length or overall length.