

D-Lock Hex Flange Bolt

Thread Type: Metric - Coarse

Thread Direction: Right Hand


Material: Carbon Steel

Class Grade: High Tensile Class 12.9

Finish: Zinc Flake Silver

Corrosion Protection Level: Excellent

Standard: HEC / CL12.9

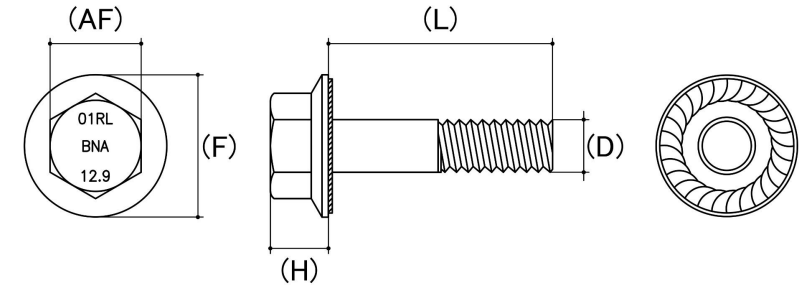

*CAD drawings shown for graphic representation only.**

Size	Thread Pitch (mm)	Thread Type	Product Diameter (D) (mm)		Head Height (H) (mm)	Flange Diameter (F) (mm)		Across Flats (AF) (mm)		Spanner Size (AF) (mm)	sku (qfind)
			Min	Max	Nom	Min	Max	Min	Max		
M8	1.25	Coarse	7.70	8.00	7.40	17.40	18.00	12.73	13.00	13	53HFLD8129ZF
M10	1.50	Coarse	9.78	10.00	9.20	20.70	21.30	14.73	15.00	15	53HFLD10129ZF
M12	1.75	Coarse	11.73	12.00	11.10	24.00	24.80	16.73	17.00	17	53HFLD12129ZF
M16	2.00	Coarse	15.73	16.00	14.40	31.00	32.00	21.67	22.00	22	53HFLD16129ZF
M20	2.50	Coarse	19.67	20.00	18.00	38.00	39.00	26.67	27.00	27	53HFLD20129ZF

Disclaimer:

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

* CAD drawings may not reflect diameter, thread length or overall length.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 18 Mar 2024