

## Hex Head Set Screw

**Thread Type:** Metric - Coarse


**Thread Direction:** Right Hand

**Material:** Stainless Steel

**Class Grade:** A4-70 G316

**Corrosion Protection Level:** Ultimate

**Standard:** DIN933

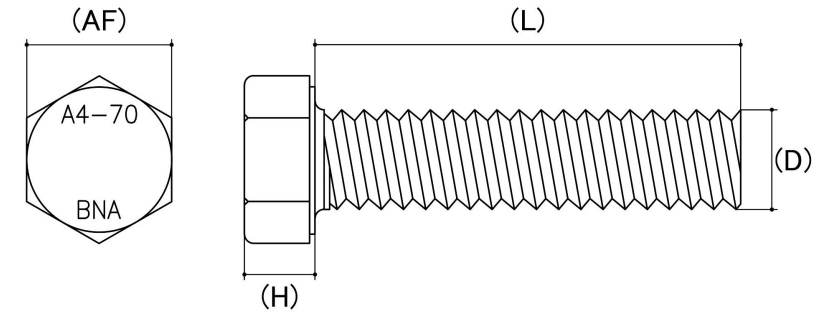

*CAD drawings shown for graphic representation only.\**

Size	Thread Pitch (mm)	Thread Type	Product Diameter (D) (mm)		Head Height (H) (mm)		Across Flats (AF) (mm)		Spanner Size (AF) (mm)	sku (qfind)
			Min	Max	Min	Max	Min	Max		
M3	0.50	Coarse	2.87	2.98	1.87	2.12	5.32	5.50	5.5	53S3M
M4	0.70	Coarse	3.83	3.97	2.67	2.92	6.78	7.00	7	53S4M
M5	0.80	Coarse	4.82	5.00	3.35	3.65	7.78	8.00	8	53S5M
M6	1.00	Coarse	5.82	6.00	3.85	4.15	9.78	10.00	10	53S6M
M8	1.25	Coarse	7.78	8.00	5.15	5.45	12.73	13.00	13	53S8M
M10	1.50	Coarse	9.78	10.00	6.22	6.58	16.73	17.00	17	53S10M
M12	1.75	Coarse	11.73	12.00	7.40	7.70	18.73	19.00	19	53S12M
M14	2.00	Coarse	13.73	14.00	8.70	8.98	21.67	22.00	22	53S14M
M16	2.00	Coarse	15.73	16.00	9.82	10.18	23.67	24.00	24	53S16M
M18	2.50	Coarse	17.73	18.00	11.28	11.90	26.20	27.00	27	53S18M
M20	2.50	Coarse	19.67	20.00	12.30	12.72	29.67	30.00	30	53S20M
M24	3.00	Coarse	23.67	24.00	14.78	15.22	35.38	36.00	36	53S24M

**Disclaimer:**

Dimensional data and technical information was obtained from publicly available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

\* CAD drawings may not reflect diameter, thread length or overall length.

