

## Machine Screw

**Head Style:** Countersunk Head

**Drive Type:** Phillips


**Thread Type:** UNC / BSW - Coarse

**Material:** Stainless Steel

**Class Grade:** A2-70 G304

**Corrosion Protection Level:** Excellent

**Standard:** ASNI B18.6.3

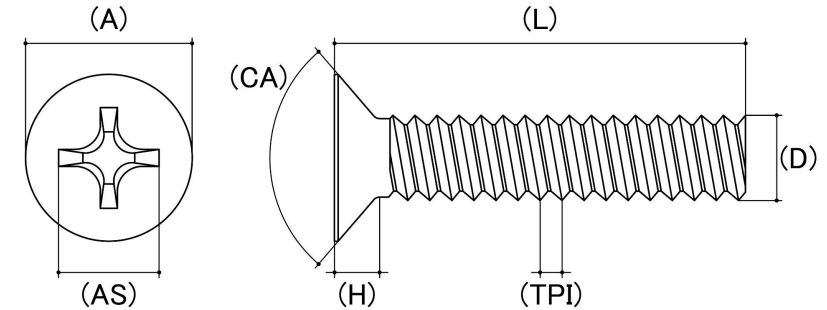

*CAD drawings shown for graphic representation only.\**

Size	Thread Pitch (TPI)	Thread Type	Product Diameter (D) (mm)		Head Diameter (A) (mm)		Head Height (H) (mm)		Driver Bit Size (AS)	sku (qfind)
			Min	Max	Min	Max	Min	Max	Nom	
#2-56	56	Coarse	2.06	2.16	3.81	4.12	1.02	1.30	PH1	21CSC256
#4-40	40	Coarse	2.69	2.82	4.86	5.39	1.40	1.71	PH1	21CSC440
1/8"	40	Coarse	3.20	-	5.11	5.57	1.40	1.71	PH2	21CSW18
#6-32	32	Coarse	3.33	3.48	6.05	6.66	1.76	2.11	PH2	21CSC632
#8-32	32	Coarse	3.99	4.15	7.24	7.88	2.14	2.54	PH2	21CSC832
5/32"	32	Coarse	3.95	4.10	6.46	6.94	1.78	2.04	PH2	21CSW532
3/16" (#10-24)	24	Coarse	4.60	4.81	7.80	8.34	2.14	2.54	PH2	21CSW316
#12-24	24	Coarse	5.41	5.60	9.66	10.47	2.85	3.36	PH3	21CSC1224
1/4"	20	Coarse	6.15	6.33	10.47	11.13	2.85	3.36	PH3	21CSW14
5/16"	18	Coarse	7.78	7.93	13.16	13.90	3.38	3.81	PH4	21CSW516

**Disclaimer:**

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

\* CAD drawings may not reflect diameter, thread length or overall length.