

Machine Screw

Head Style: Countersunk Head

Drive Type: Slot


Thread Type: Metric - Coarse

Material: Solid Brass

Class Grade: Low Tensile Class 4.6

Corrosion Protection Level: Ultimate

Standard: AS1427:1996

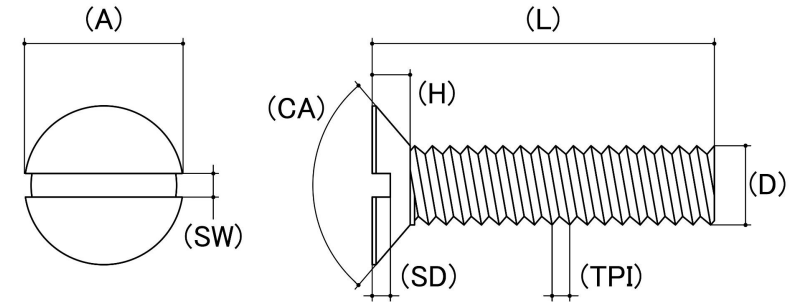

*Cad Drawings shown for graphic representation only.**

Size	Thread Pitch (mm)	Thread Type	Product Diameter (D) (mm)		Head Diameter (A) (mm)		Head Height (H) (mm)		Slot Width (SW) (mm)		Slot Depth (SD) (mm)		Countersunk Angle	Driver Bit Size (AS)	sku (Part Number)
			Min	Max	Min	Max	Min	Max	Min	Max	Min	Max			
M2.5	0.45mm	Coarse	2.38	2.48	4.40	5.50	1.30	1.50	0.70	0.80	0.50	0.75	90°	SL4	21CSLB25
M3	0.50mm	Coarse	2.87	2.98	5.30	6.30	1.43	1.65	0.90	1.00	0.60	0.85	90°	SL5	21CSLB3
M4	0.70mm	Coarse	3.83	3.97	7.00	8.40	1.94	2.20	1.30	1.50	1.00	1.30	90°	SL6	21CSLB4
M5	0.80mm	Coarse	4.82	5.00	8.80	10.00	2.20	2.50	1.30	1.50	1.10	1.40	90°	SL8	21CSLB5
M6	1.00mm	Coarse	5.82	6.00	10.50	12.00	2.66	3.00	1.70	1.90	1.20	1.60	90°	SL10	21CSLB6
M8	1.25mm	Coarse	7.78	8.00	14.00	16.00	3.58	4.00	2.10	2.30	1.80	2.30	90°	SL12	21CSLB8

Disclaimer:

Dimensional data and technical information was obtained from publicly available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

* Cad Drawings may not reflect diameter, thread length or overall length.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 29 Aug 2024