

Machine Screw

Head Style: Countersunk Head

Drive Type: Slot


Thread Type: Metric - Coarse

Material: Nylon

Finish: White

Corrosion Protection Level: Excellent

Standard: DIN 963

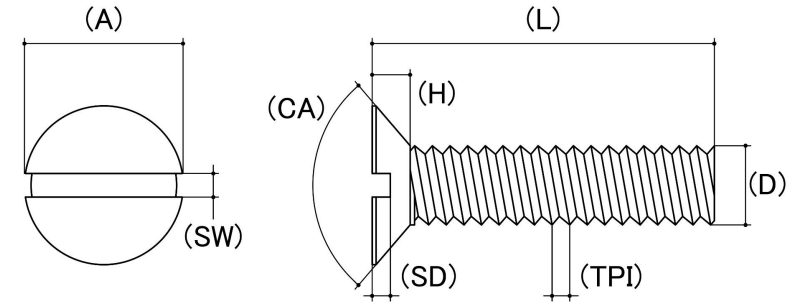

*Cad Drawings shown for graphic representation only.**

Size	Thread Pitch (mm)	Thread Type	Product Diameter (D) (mm)		Head Diameter (A) (mm)		Head Height (H) (mm)	Slot Width (SW) (mm)	Countersunk Angle	Driver Bit Size (AS)	sku (Part Number)
			Min	Max	Min	Max	Nom	Nom			
M3	0.50mm	Coarse	2.87	2.98	5.30	5.60	1.65	0.80	90°	SL5	21CSLNY3
M4	0.70mm	Coarse	3.83	3.97	7.14	7.50	2.20	1.00	90°	SL6	21CSLNY4
M5	0.80mm	Coarse	4.82	5.00	8.84	9.20	2.50	1.20	90°	SL8	21CSLNY5
M6	1.00mm	Coarse	5.82	6.00	10.57	11.00	3.00	1.60	90°	SL10	21CSLNY6
M8	1.25mm	Coarse	7.78	8.00	14.07	14.50	4.00	2.00	90°	SL10	21CSLNY8
M10	1.50mm	Coarse	9.78	10.00	17.57	18.00	5.00	2.56	90°	SL10	21CSLNY10
M12	1.75mm	Coarse	11.73	12.00	21.48	22.00	6.00	3.06	90°	SL10	21CSLNY12

Disclaimer:

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

* Cad Drawings may not reflect diameter, thread length or overall length.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 29 Aug 2024