Machine Screw

Head Style: Countersunk Head


Drive Type: Slot

Thread Type: Metric - Coarse

Material: Stainless Steel Class Grade: A4-70 G316

Corrosion Protection Level: Ultimate

Standard: DIN 963

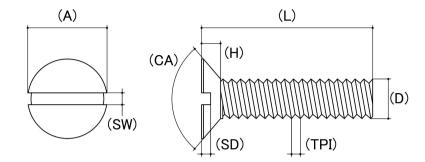

CAD drawings shown for graphic representation only.*

Size	Thread Pitch (mm)	Thread Type	Product Diameter (D) (mm)		Head Diameter (A) (mm)		Head Height (H) (mm)	Slot Width (SW) (mm)	Driver Bit Size (AS)	sku - (qfind)
			Min	Max	Min	Max	Nom	Nom	Nom	(qiiia)
M3	0.50	Coarse	2.87	2.98	5.30	5.60	1.65	0.80	SL5	21CSLS3M
M4	0.70	Coarse	3.83	3.97	7.14	7.50	2.20	1.00	SL6	21CSLS4M
M5	0.80	Coarse	4.82	5.00	8.84	9.20	2.50	1.20	SL8	21CSLS5M
M6	1.00	Coarse	5.82	6.00	10.57	11.00	3.00	1.60	SL10	21CSLS6M
M8	1.25	Coarse	7.78	8.00	14.07	14.50	4.00	2.00	SL10	21CSLS8M

Disclaimer:

Dimensional data and technical information was obtained from publically available

sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only;

where discrepancies are found they are subject to change without notice. Bolt & Nut Australia

makes no warranties or representations regarding the accuracy and validity of the compiled information and data.

Contact the relevant standard authorities for accurate and detailed information.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 19 Mar 2024

^{*} CAD drawings may not reflect diameter, thread length or overall length.