Machine Screw

Head Style: Countersunk Head


Drive Type: Slot

Thread Type: UNC / BSW - Coarse

Material: Solid Brass

Class Grade: Low Tensile Class 4.6 Corrosion Protection Level: Ultimate

Standard: AS B50

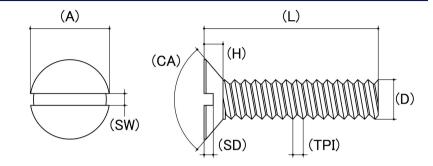

CAD drawings shown for graphic representation only.*

Size	Thread Pitch (TPI)	Thread Type	Product Diameter (D) (mm)		Head Diameter (A) (mm)		Head Height (H) (mm)		Driver Bit Size (AS)	sku (qfind)
			Min	Max	Min	Max	Min	Max	Nom	(qiiid)
1/8"	40	Coarse	3.20	-	5.11	5.57	1.40	1.71	SL5	21CSLBW18
5/32"	32	Coarse	3.95	4.10	6.46	6.94	1.78	2.04	SL6	21CSLBW532
3/16" (#10-24)	24	Coarse	4.60	4.81	7.80	8.34	2.14	2.54	SL6	21CSLBW316
1/4"	20	Coarse	6.15	6.33	10.47	11.13	2.85	3.36	SL8	21CSLBW14
5/16"	18	Coarse	7.78	7.93	13.16	13.90	3.38	3.81	SL10	21CSLBW516

Disclaimer:

Dimensional data and technical information was obtained from publically available

sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only,

where discrepancies are found they are subject to change without notice. Bolt & Nut Australia

makes no warranties or representations regarding the accuracy and validity of the compiled information and data.

Contact the relevant standard authorities for accurate and detailed information.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 19 Mar 2024

^{*} CAD drawings may not reflect diameter, thread length or overall length.