
Hook Hook Turnbuckle

Material: Stainless Steel Class Grade: A4-70 G316

Corrosion Protection Level: Ultimate

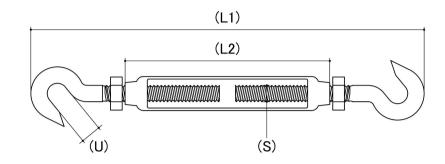

CAD drawings shown for graphic representation only.*

Size	Thread Pitch (mm)	Thread Type	Length L (1) (mm)	Length L (2) (mm)	Length Unwound (mm)	Inside Dia. of Hook (U) (mm)	Breaking Load	sku (qfind)
			Nom	Nom	Nom	Nom	Nom	
M4	0.70	Coarse	98.00	55.00	162.00	9.00	100	62TBSHH455M
M5	0.80	Coarse	120.00	70.00	184.00	9.00	130	62TBSHH570M
M6	1.00	Coarse	160.00	90.00	232.00	10.00	350	62TBSHH690M
M8	1.25	Coarse	200.00	120.00	289.00	11.00	650	62TBSHH8120M
M10	1.50	Coarse	240.00	150.00	368.00	12.00	800	62TBSHH10150M
M12	1.75	Coarse	300.00	200.00	476.00	18.00	1400	62TBSHH12200M
M16	2.00	Coarse	390.00	250.00	625.00	25.00	-	62TBSHH16250M
M20	2.50	Coarse	510.00	300.00	736.00	28.00	-	62TBSHH20300M

Disclaimer:

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only,

where discrepancies are found they are subject to change without notice. Bolt & Nut Australia

makes no warranties or representations regarding the accuracy and validity of the compiled information and data.

Contact the relevant standard authorities for accurate and detailed information.

* CAD drawings may not reflect diameter, thread length or overall length.

© Bolt & Nut Australia Pty Ltd. All rights reserved

Version: 18 Mar 2024