


Spring Hook

Material: Stainless Steel

Class Grade: A4-70 G316

Corrosion Protection Level: Ultimate

Comments: This product range is not rated and has no markings. Breaking load information provided is to be used as a guide only

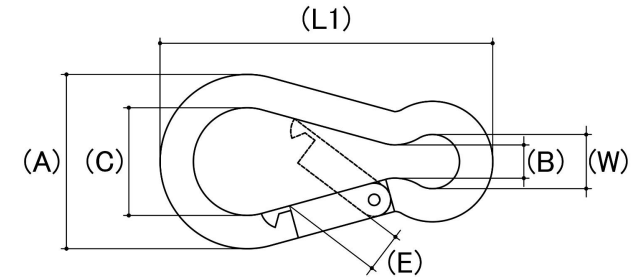

*Cad Drawings shown for graphic representation only.**

Size	Length L (1) (mm)	Width (A) (mm)		Width Of Opening (B) (mm)		Inside Small Eye (W) (mm)		Inside Large Eye (C) (mm)		Width Of Spring Opening (E) (mm)		Breaking Load Kgs (Not Rated Guide only)	sku (Part Number)
		Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Nom	
4mm	40.00	19.80	20.20	4.60	4.90	6.20	6.30	12.40	12.60	3.60	3.80	-	62SPHS440M
5mm	50.00	24.80	25.20	6.20	6.40	7.90	8.10	15.40	15.60	6.10	6.30	220	62SPHS550M
6mm	60.00	29.80	30.20	6.50	6.60	9.00	9.20	18.40	18.60	8.50	8.70	272	62SPHS660M
8mm	80.00	39.80	40.20	9.30	9.50	12.00	12.20	25.60	25.80	8.90	9.10	508	62SPHS880M
10mm	100.00	49.80	50.20	12.50	12.70	15.30	15.50	31.40	31.60	14.70	14.90	728	62SPHS10100M
11mm	120.00	59.80	60.20	14.20	14.40	18.80	19.00	37.40	37.60	17.20	17.40	816	62SPHS11120M

Disclaimer:

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

* Cad Drawings may not reflect diameter, thread length or overall length.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 23 Sep 2024