


Chemical Injection Adhesive

Internal External: External

Seismic Assessment: C1 + C2

Suitable For: Concrete, Cracked Concrete, Overhead, Masonry / Brickwork, Rebar, Threaded Stud, Threaded Inserts, Wet Holes, Water Filled Holes, Core Drilled Holes

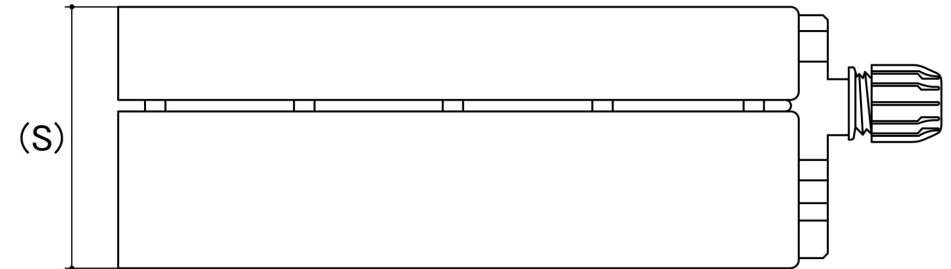

*Cad Drawings shown for graphic representation only.**

Size	Supplier Code	Adhesive Type	Product Strength	Working Time	Curing Time	To Suit Tool	sku (Part Number)
280ml	BIS-HY280 GEN2	Hybrid	Extreme	3 mins	30 mins	280/300ml Gun	64BISHY280S
300ml	BIS-V300	Vinylester	High	6 mins	45 mins	280/300ml Gun	64BISV300G
300ml	BIS-P300 GEN2	Polyester	Medium	6 mins	45 mins	280/300ml Gun	64BISP300B
420ml	BIS-HY420 GEN2	Hybrid	Extreme	3 mins	30 mins	400/420ml Gun	64BISHY420S
420ml	BIS-V420	Vinylester	High	6 mins	45 mins	400/420ml Gun	64BISV420G
420ml	BIS-P420 GEN2	Polyester	Medium	6 mins	45 mins	400/420ml Gun	64BISP420B
585ml	BIS-PE GEN3-585	Pure Epoxy	Extreme	30 mins	12 hrs	385/440/585ml Gun	64BISPE585W
585ml	BIS-E585	Epoxy	High	30 mins	12 hrs	385/440/585ml Gun	64BISE585R

Disclaimer:

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

* Cad Drawings may not reflect diameter, thread length or overall length.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 05 Aug 2024