


Chemical Injection Adhesive

Internal External: External

Seismic Assessment: C1 + C2

Suitable For: Concrete, Cracked Concrete, Overhead, Masonry / Brickwork, Rebar, Threaded Stud, Threaded Inserts, Wet Holes, Water Filled Holes, Core Drilled Holes

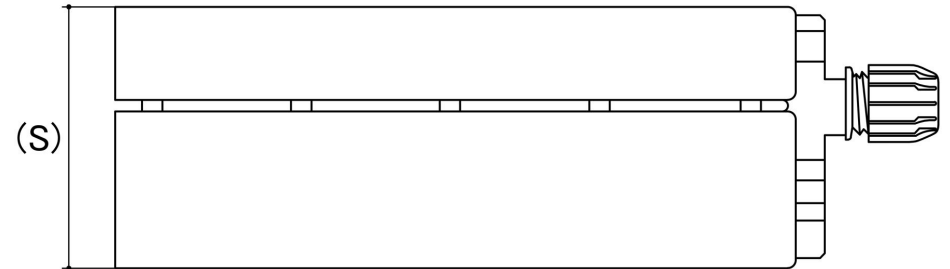

*Cad Drawings shown for graphic representation only.**

Size	Supplier Code	Adhesive Type	Product Strength	Working Time	Curing Time	To Suit Tool	sku (Part Number)
300ml	MIT-SE PLUS	Vinylester	High	6 mins	45 mins	280/300ml Gun	64SE300
300ml	MIT-SP MORTAR	Polyester	Medium	6 mins	45 mins	280/300ml Gun	64SP300
400ml	MIT-SE PLUS	Vinylester	High	6 mins	45 mins	400/420ml Gun	64SE400
400ml	MIT-SP MORTAR	Polyester	Medium	6 mins	45 mins	400/420ml Gun	64SP400
585ml	MIT-700-RE	Pure Epoxy	Extreme	30 mins	12 hrs	385/440/585ml Gun	64700RE585

Disclaimer:

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data.

Contact the relevant standard authorities for accurate and detailed information.

* Cad Drawings may not reflect diameter, thread length or overall length.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 05 Aug 2024