

Chemical Anchor Stud


Head Style: Hex Head

Material: Carbon Steel

Class Grade: Low Tensile Class 5.8

Material Finish: Galvanised

Corrosion Protection Level: Excellent

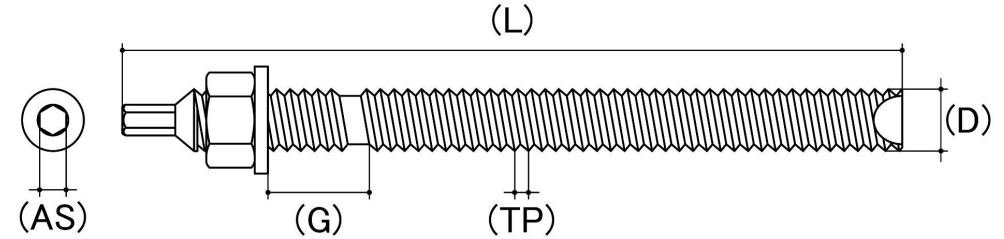

*CAD drawings shown for graphic representation only.**

Size	Thread Size x Pitch	Length (mm)	Anchor Length (L) (mm)	Embedment Depth (mm)	Minimum Spacing (mm)	Min Base Material Thick (B) (mm)	Max Fast Thickness (G) (mm)	Drill Hole Size (mm)	Drive Size (AS) (mm)	sku (qfind)
	Nom	Nom	Nom	Nom	Nom	Nom	Nom	Nom	Nom	
M8	M8 x 1.25p	110	110	80.00	40	100.00	10.00	10.00	13.00	65CA8110CPG
M10	M10 x 1.50p	130	130	90.00	45	120.00	19.00	12.00	16.00	65CA10130CPG
M12	M12 x 1.75p	160	160	110.00	55	140.00	22.00	14.00	18.00	65CA12160CPG
M16	M16 x 2.00p	190	190	125.00	65	160.00	34.00	18.00	24.00	65CA16190CPG
M20	M20 x 2.50p	260	260	170.00	85	220.00	58.00	22.00	30.00	65CA20260CPG
M24	M24 x 3.00p	300	300	210.00	105	280.00	49.00	26.00	36.00	65CA24300CPG

Disclaimer:

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

* CAD drawings may not reflect diameter, thread length or overall length.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 18 Mar 2024