

## Chemical Anchor Stud


**Head Style:** Hex Head

**Material:** Stainless Steel

**Class Grade:** A4-70 G316

**Material Finish:** Stainless A4-70 G316

**Corrosion Protection Level:** Ultimate

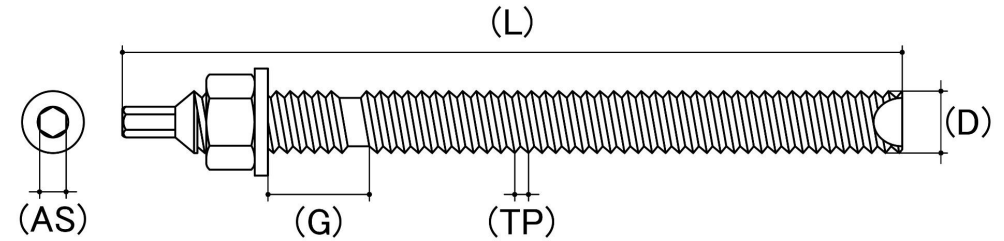

*CAD drawings shown for graphic representation only.\**

Size	Thread Size x Pitch	Length (mm)	Anchor Length (L) (mm)	Embedment Depth (mm)	Minimum Spacing (mm)	Min Base Material Thick (B) (mm)	Max Fast Thickness (G) (mm)	Drill Hole Size (mm)	Drive Size (AS) (mm)	sku (qfind)
	Nom	Nom	Nom	Nom	Nom	Nom	Nom	Nom		
M8	M8 x 1.25p	110	110	80.00	40	110.00	14.00	10.00	13.00	65CAS8110CPM
M10	M10 x 1.50p	130	130	90.00	45	120.00	23.00	12.00	16.00	65CAS10130CPM
M12	M12 x 1.75p	160	160	110.00	55	140.00	27.00	14.00	18.00	65CAS12160CPM
M16	M16 x 2.00p	190	190	125.00	65	160.00	35.00	18.00	24.00	65CAS16190CPM
M20	M20 x 2.50p	260	260	170.00	85	220.00	55.00	22.00	30.00	65CAS20260CPM
M24	M24 x 3.00p	300	300	210.00	105	280.00	50.00	26.00	36.00	65CAS24300CPM

**Disclaimer:**

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

\* CAD drawings may not reflect diameter, thread length or overall length.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 18 Mar 2024