

H-IT Strike Anchors


Head Style: Countersunk Head

Material: AISI 1040 Carbon Steel

Class Grade: High Tensile Class 10.9

Material Finish: Galvanised

Corrosion Protection Level: Excellent

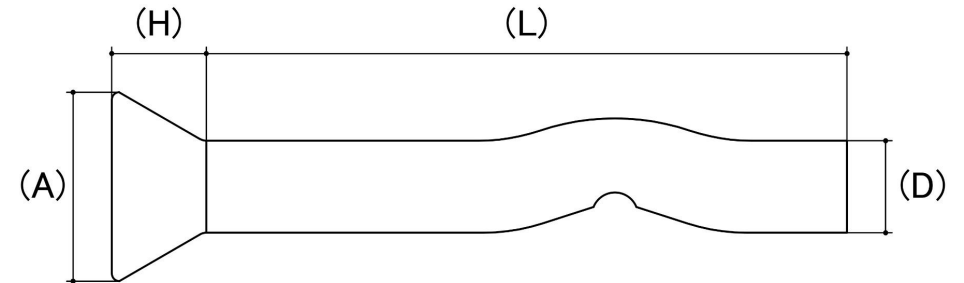

*CAD drawings shown for graphic representation only.**

Size	Length (mm)	Anchor Length (L) (mm)	Head Diameter (A) (mm)	Embedment Depth (mm)	Minimum Spacing (mm)	Drill Hole Size (mm)	sku (qfind)
	Nom	Nom	Nom	Nom	Nom	Nom	
M5	65	65	11.00	25.00	50	5.00	65CHIT565G
M5	75	75	11.20	25.00	50	5.00	65CHIT575G
M5	100	100	11.20	30.00	50	5.00	65CHIT5100G
M6.5	38	38	11.80	25.00	65	6.50	65CHIT6538G
M6.5	50	50	12.00	25.00	65	6.50	65CHIT6550G
M6.5	65	65	12.00	25.00	65	6.50	65CHIT6565G
M6.5	75	75	12.00	30.00	65	6.50	65CHIT6575G
M6.5	100	100	12.00	30.00	65	6.50	65CHIT65100G

Disclaimer:

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

* CAD drawings may not reflect diameter, thread length or overall length.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 18 Mar 2024