

Countersunk Screw Anchor / Screw Bolt / Xbolt


Head Style: Countersunk Head

Material: Carbon Steel

Class Grade: Low Tensile Class 5.8

Material Finish: Galvanised

Corrosion Protection Level: Excellent

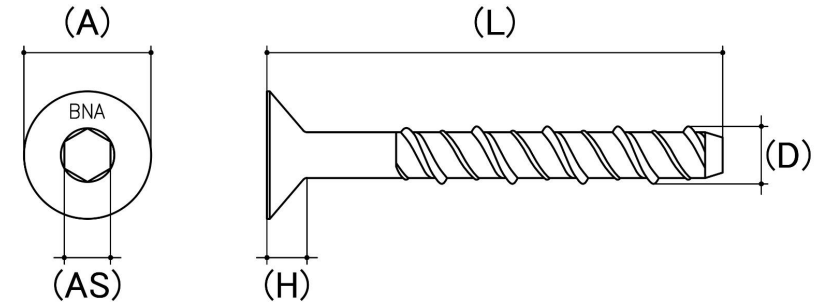

CAD drawings shown for graphic representation only.*

Size	Length (mm)	Anchor Length (L) (mm)	Head Diameter (A) (mm)	Head Height (H) (mm)		Min Hole Dia On Fixture (mm)	Embedment Depth (mm)	Minimum Spacing (mm)	Drill Hole Size (mm)	Drive Size (AS) (mm)	sku (qfind)
	Nom	Nom	Nom	Min	Max	Nom	Nom	Nom	Nom	Nom	
M6	50	50	16.10	6.30	6.50	8	25.00	40	6.00	5.00	65CSB650G
M6	75	75	16.10	6.30	6.50	8	25.00	40	6.00	5.00	65CSB675G
M8	50	50	20.40	7.50	7.70	11	40.00	40	8.00	6.00	65CSB850G
M8	75	75	20.40	7.50	7.70	11	40.00	40	8.00	6.00	65CSB875G
M8	100	100	20.40	7.50	7.70	11	40.00	40	8.00	6.00	65CSB8100G
M10	60	60	24.00	9.30	9.50	13	50.00	50	10.00	8.00	65CSB1060G
M10	75	75	24.00	9.30	9.50	13	50.00	50	10.00	8.00	65CSB1075G
M10	100	100	24.00	9.30	9.50	13	50.00	50	10.00	8.00	65CSB10100G
M12	75	75	27.65	10.20	10.40	15	55.00	60	12.00	10.00	65CSB1275G
M12	100	100	27.65	10.20	10.40	15	55.00	60	12.00	10.00	65CSB12100G
M12	150	150	27.65	10.20	10.40	15	55.00	60	12.00	10.00	65CSB12150G

Disclaimer:

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

* CAD drawings may not reflect diameter, thread length or overall length.