

Sleeve Anchor / Tygabolt / Dynabolt


Head Style: Countersunk Head

Material: Carbon Steel

Class Grade: Low Tensile Class 4.6

Material Finish: Zinc Yellow Plated

Corrosion Protection Level: Moderate

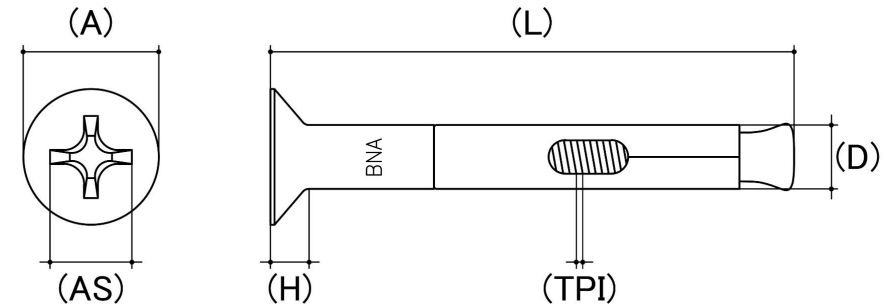

*CAD drawings shown for graphic representation only.**

Size	Thread Size x Pitch	Length (mm)	Anchor Length (L) (mm)	Head Diameter (A) (mm)		Head Height (H) (mm)		Max Fast Thickness (G) (mm)	Drill Hole Depth (mm)	Drill Hole Size (mm)	Drive Size (AS)	sku (qfind)
				Min	Max	Min	Max					
M6.5	M5 x 0.80p	35	35	11.70	12.30	3.60	3.90	5.00	30.00	6.50	PH3	65CSA6535
M6.5	M5 x 0.80p	55	55	11.70	12.30	3.60	3.90	15.00	40.00	6.50	PH3	65CSA6555
M6.5	M5 x 0.80p	75	75	11.70	12.30	3.60	3.90	20.00	55.00	6.50	PH3	65CSA6575
M8	M6 x 1.00p	60	60	13.60	14.20	5.00	5.50	25.00	35.00	8.00	PH4	65CSA860
M8	M6 x 1.00p	85	85	13.60	14.20	5.00	5.50	35.00	50.00	8.00	PH4	65CSA885
M10	M8 x 1.25p	75	75	17.70	18.40	5.00	5.50	20.00	55.00	10.00	PH4	65CSA1075
M10	M8 x 1.25p	100	100	17.70	18.40	5.00	5.50	40.00	60.00	10.00	PH4	65CSA10100
M10	M8 x 1.25p	120	120	17.70	18.40	5.00	5.50	50.00	75.00	10.00	PH4	65CSA10125

Disclaimer:

Dimensional data and technical information was obtained from publicly available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

* CAD drawings may not reflect diameter, thread length or overall length.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 18 Mar 2024