

## Dome Screw Anchor / Screw Bolt / Xbolt


**Head Style:** Dome Head

**Material:** Carbon Steel

**Class Grade:** Low Tensile Class 5.8

**Material Finish:** Galvanised

**Corrosion Protection Level:** Excellent

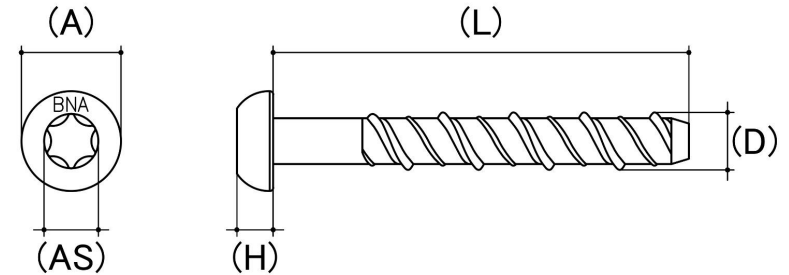

CAD drawings shown for graphic representation only.\*

Size	Length (mm)	Anchor Length (L) (mm)	Head Diameter (A) (mm)	Head Height (H) (mm)	Min Hole Dia On Fixture (mm)	Embedment Depth (mm)	Minimum Spacing (mm)	Max Fast Thickness (G) (mm)	Drill Hole Size (mm)	Drive Size (AS)	sku (qfind)
	Nom	Nom	Nom	Nom	Nom	Nom	Nom	Nom	Nom	Nom	
M6	65	65	16.00	4.50	8	25.00	40	5.00	6.00	T30	65SBT665G
M6	75	75	16.00	4.50	8	25.00	40	50.00	6.00	T30	65SBT675G
M6	100	100	16.00	4.50	8	25.00	40	75.00	6.00	T30	65SBT6100G
M8	60	60	18.00	5.85	10	40.00	40	20.00	8.00	T40	65SBT860G
M8	75	75	18.00	5.85	10	40.00	40	35.00	8.00	T40	65SBT875G
M8	100	100	18.00	5.85	10	40.00	40	60.00	8.00	T40	65SBT8100G
M10	75	75	22.00	7.50	12	50.00	50	25.00	10.00	T50	65SBT1075G
M10	100	100	22.00	7.50	12	50.00	50	50.00	10.00	T50	65SBT10100G
M10	150	150	22.00	7.50	12	50.00	50	100.00	10.00	T50	65SBT10150G

**Disclaimer:**

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

\* CAD drawings may not reflect diameter, thread length or overall length.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 18 Mar 2024