

Drop-In Anchor

Head Style: Countersunk Head

Body Type: Smooth


Material: Stainless Steel

Class Grade: A4-70 G316

Material Finish: Stainless A4-70 G316

Corrosion Protection Level: Ultimate

Brand: Hobson Engineering

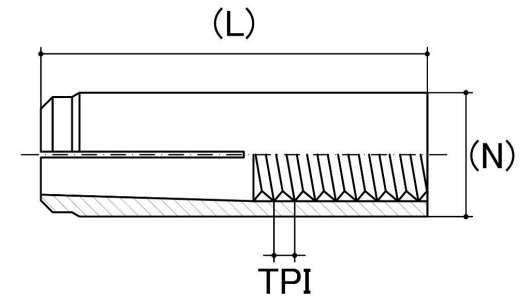

*CAD drawings shown for graphic representation only.**

Size	Thread Size x Pitch	Length (mm)	Anchor Length (L) (mm)	Body Diameter (N) (mm)	Minimum Spacing (mm)	Min Base Material Thick (B) (mm)	Max Fast Thickness (G) (mm)	Drill Hole Size (mm)	sku (qfind)
	Nom	Nom	Nom	Nom					
M6	M6 x 1.00p	25	25	8.00	55	100	10	8	65DIS625M
M8	M8 x 1.25p	30	30	10.00	60	100	12	10	65DIS830M
M10	M10 x 1.50p	40	40	12.00	100	120	15	12	65DIS1040M
M12	M12 x 1.75p	50	50	15.00	120	130	20	15	65DIS1250M
M16	M16 x 2.00p	65	65	20.00	150	160	25	20	65DIS1665M

Disclaimer:

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

* CAD drawings may not reflect diameter, thread length or overall length.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 08 Apr 2024