

## Drop-In Anchor

**Head Style:** Countersunk Head


**Body Type:** Smooth

**Material:** Carbon Steel

**Class Grade:** Low Tensile Class 4.6

**Material Finish:** Zinc Yellow Plated

**Corrosion Protection Level:** Moderate

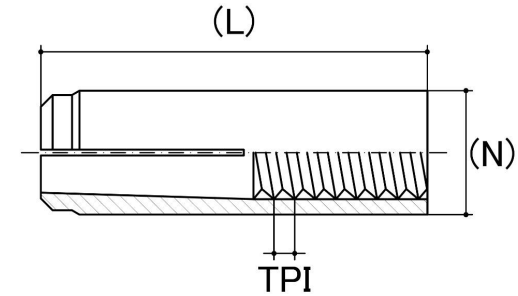

*CAD drawings shown for graphic representation only.\**

Size	Thread Size x Pitch	Length (mm)	Anchor Length (L) (mm)	Body Diameter (N) (mm)	Minimum Spacing (mm)	Min Base Material Thick (B) (mm)	Max Fast Thickness (G) (mm)	Drill Hole Size (mm)	sku (qfind)
	Nom	Nom	Nom	Nom	Nom	Nom	Nom	Nom	
M6	M6 x 1.00p	25	25	8.00	55	100.00	10.00	8.00	65DI625
M8	M8 x 1.25p	30	30	10.00	60	100.00	12.00	10.00	65DI830
M10	M10 x 1.50p	40	40	12.00	100	120.00	15.00	12.00	65DI1040
M12	M12 x 1.75p	50	50	15.00	120	130.00	20.00	15.00	65DI1250
M16	M16 x 2.00p	65	65	20.00	150	160.00	25.00	20.00	65DI1665
M20	M20 x 2.50p	80	80	25.00	160	200.00	30.00	25.00	65DI2080

**Disclaimer:**

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

\* CAD drawings may not reflect diameter, thread length or overall length.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 18 Mar 2024