

ETA Approved Screw Anchor / Screw Bolt / Xbolt


Head Style: Countersunk Head

Material: Bi-Metal Stainless

Class Grade: A4-70 G316

Material Finish: Stainless A4-70 G316

Corrosion Protection Level: Ultimate

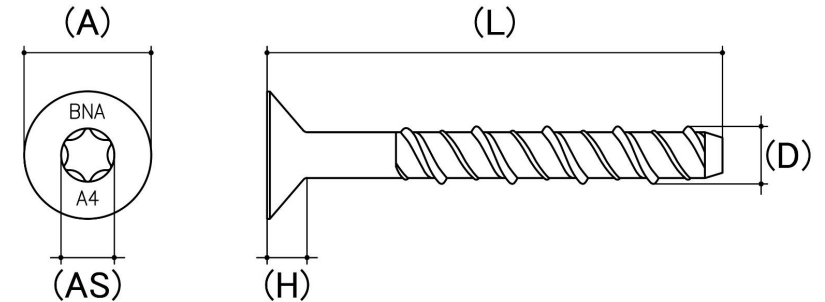

*CAD drawings shown for graphic representation only.**

Size	Length (mm)	Anchor Length (L) (mm)	Thread Length (T)	Head Diameter (A) (mm)	Head Height (H) (mm)	Min Hole Dia On Fixture (mm)	Embedment Depth (mm)	Max Fast Thickness (G) (mm)	Drill Hole Depth (mm)	Drill Hole Size (mm)	Drive Size (AS)	sku (qfind)
	Nom	Nom	Nom	Nom	Nom	Nom	Nom	Nom	Nom	Nom	Nom	
M6	80	80	Full Thread	15.30	5.20	9	70.00	10.00	80.00	6.00	T40	65CSBTS680PM
M8	95	95	Full Thread	17.80	7.30	11	85.00	10.00	95.00	8.00	T45	65CSBTS895PM

Disclaimer:

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

* CAD drawings may not reflect diameter, thread length or overall length.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 18 Mar 2024