

ETA Approved Screw Anchor / Screw Bolt / Xbolt


Head Style: Hex Flange Head

Material: Bi-Metal Stainless

Class Grade: A4-70 G316

Material Finish: Stainless A4-70 G316

Corrosion Protection Level: Ultimate

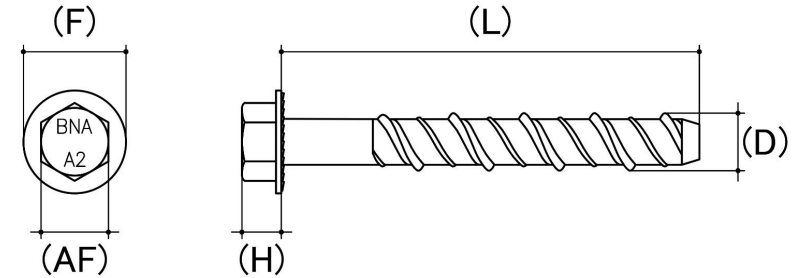

*CAD drawings shown for graphic representation only.**

Size	Length (mm)	Anchor Length (L) (mm)	Flange Diameter (F) (mm)	Head Height (H) (mm)	Min Hole Dia On Fixture (mm)	Embedment Depth (mm)	Max Fast Thickness (G) (mm)	Drill Hole Depth (mm)	Drill Hole Size (mm)	Spanner Size (AS) (mm)	sku (qfind)
	Nom	Nom	Nom	Nom	Nom	Nom	Nom	Nom	Nom		
M6	80	80	12.60	5.80	9	55.00	20.00	65.00	6.00	10	65SBS680PM
M8	90	90	16.80	7.50	11	65.00	30.00	75.00	8.00	13	65SBS890PM
M8	100	100	16.80	7.50	11	65.00	35.00	75.00	8.00	13	65SBS8100PM
M10	105	105	21.20	9.10	13	75.00	25.00	85.00	10.00	15	65SBS10105PM
M10	120	120	21.20	9.10	13	75.00	65.00	85.00	10.00	15	65SBS10120PM
M12	150	150	25.00	11.00	15	95.00	55.00	105.00	12.00	17	65SBS12150PM

Disclaimer:

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

* CAD drawings may not reflect diameter, thread length or overall length.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 18 Mar 2024