

Sleeve Anchor / Tygabolt / Dynabolt


Head Style: Hex Flange Head

Material: Stainless Steel

Class Grade: A4-70 G316

Material Finish: Stainless A4-70 G316

Corrosion Protection Level: Ultimate

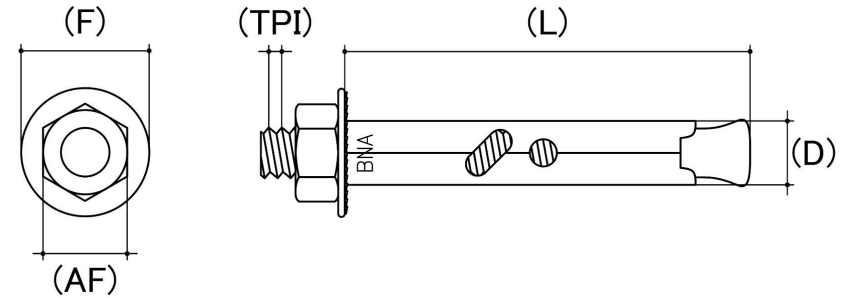

*CAD drawings shown for graphic representation only.**

Size	Thread Size x Pitch	Length (mm)	Anchor Length (L) (mm)	Flange Diameter (F) (mm)	Max Fast Thickness (G) (mm)	Drill Hole Depth (mm)	Drill Hole Size (mm)	Spanner Size (AS) (mm)	sku (qfind)
	Nom	Nom	Nom	Nom	Nom	Nom	Nom		
M6.5	M5 x 0.80p	35	35	11.00	5.00	30.00	6.50	8	65SAS6535M
M6.5	M5 x 0.80p	55	55	11.00	15.00	40.00	6.50	8	65SAS6555M
M8	M6 x 1.00p	40	40	13.00	15.00	25.00	8.00	10	65SAS840M
M8	M6 x 1.00p	65	65	13.00	30.00	35.00	8.00	10	65SAS860M
M8	M6 x 1.00p	85	85	13.00	35.00	50.00	8.00	10	65SAS885M
M10	M8 x 1.25p	50	50	17.00	10.00	40.00	10.00	13	65SAS1050M
M10	M8 x 1.25p	75	75	17.00	20.00	55.00	10.00	13	65SAS1075M
M10	M8 x 1.25p	100	100	17.00	40.00	60.00	10.00	13	65SAS10100M
M12	M10 x 1.50p	60	60	17.00	20.00	40.00	12.00	15	65SAS1260M
M12	M10 x 1.50p	80	80	17.00	25.00	50.00	12.00	15	65SAS1280M
M12	M10 x 1.50p	100	100	17.00	40.00	60.00	12.00	15	65SAS12100M

Disclaimer:

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

* CAD drawings may not reflect diameter, thread length or overall length.