

## Sleeve Anchor / Tygabolt / Dynabolt


**Head Style:** Hex Flange Head

**Material:** Carbon Steel

**Class Grade:** Low Tensile Class 4.6

**Material Finish:** Zinc Yellow Plated

**Corrosion Protection Level:** Moderate

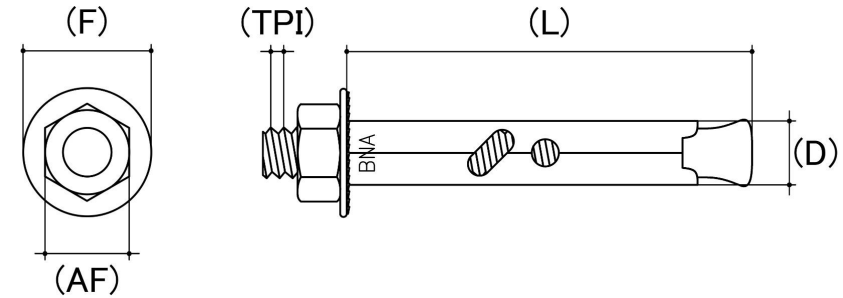

*CAD drawings shown for graphic representation only.\**

Size	Thread Size x Pitch	Length (mm)	Anchor Length (L) (mm)	Flange Diameter (F) (mm)	Max Fast Thickness (G) (mm)	Drill Hole Depth (mm)	Drill Hole Size (mm)	Spanner Size (AS) (mm)	sku (qfind)
	Nom	Nom	Nom	Nom	Nom	Nom	Nom		
M6.5	M5 x 0.80p	25	25	11.00	4.00	21.00	6.50	8	65SA6525
M6.5	M5 x 0.80p	35	35	11.00	5.00	30.00	6.50	8	65SA6535
M6.5	M5 x 0.80p	55	55	11.00	15.00	40.00	6.50	8	65SA6555
M6.5	M5 x 0.80p	75	75	11.00	20.00	55.00	6.50	8	65SA6575
M8	M6 x 1.00p	40	40	13.00	15.00	25.00	8.00	10	65SA840
M8	M6 x 1.00p	65	65	13.00	30.00	35.00	8.00	10	65SA865
M8	M6 x 1.00p	65	65	13.00	35.00	50.00	8.00	10	65SA885
M10	M8 x 1.25p	40	40	17.00	5.00	35.00	10.00	13	65SA1040
M10	M8 x 1.25p	50	50	17.00	10.00	40.00	10.00	13	65SA1050
M10	M8 x 1.25p	60	60	17.00	10.00	50.00	10.00	13	65SA1060
M10	M8 x 1.25p	75	75	17.00	20.00	55.00	10.00	13	65SA1075
M10	M8 x 1.25p	100	100	17.00	40.00	60.00	10.00	13	65SA10100
M10	M8 x 1.25p	125	125	17.00	50.00	75.00	10.00	13	65SA10125
M12	M10 x 1.50p	60	60	20.00	20.00	40.00	12.00	15	65SA1260
M12	M10 x 1.50p	80	80	20.00	25.00	50.00	12.00	15	65SA1275

Size	Thread Size x Pitch	Length (mm)	Anchor Length (L) (mm)	Flange Diameter (F) (mm)	Max Fast Thickness (G) (mm)	Drill Hole Depth (mm)	Drill Hole Size (mm)	Spanner Size (AS) (mm)	sku (qfind)
	Nom	Nom	Nom	Nom	Nom	Nom	Nom		
M12	M10 x 1.50p	100	100	20.00	40.00	60.00	12.00	15	65SA12100
M12	M10 x 1.50p	130	130	20.00	50.00	80.00	12.00	15	65SA12130
M16	M12 x 1.75p	65	65	24.00	10.00	55.00	16.00	19	65SA1665
M16	M12 x 1.75p	110	110	24.00	40.00	70.00	16.00	19	65SA16105
M16	M12 x 1.75p	145	145	24.00	50.00	95.00	16.00	19	65SA16145
M20	M16 x 2.00p	75	75	33.00	15.00	60.00	20.00	24	65SA2075
M20	M16 x 2.00p	105	105	33.00	25.00	80.00	20.00	24	65SA20105
M20	M16 x 2.00p	160	160	33.00	50.00	100.00	20.00	24	65SA20150

**Disclaimer:**

Dimensional data and technical information was obtained from publicly available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data.

Contact the relevant standard authorities for accurate and detailed information.

\* CAD drawings may not reflect diameter, thread length or overall length.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 18 Mar 2024