

Tie Down Coupler Screw Anchor


Head Style: Tie Wire

Material: Carbon Steel

Class Grade: Low Tensile Class 5.8

Material Finish: Galvanised

Corrosion Protection Level: Excellent

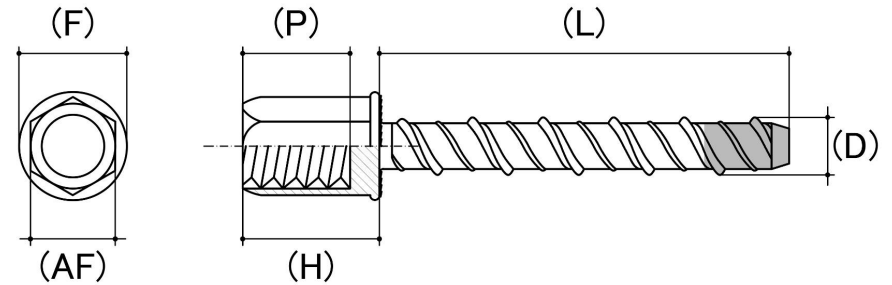

CAD drawings shown for graphic representation only.*

Size	Thread Size x Pitch	Length (mm)	Anchor Length (L) (mm)	Thread Length (T) (mm)	Flange Diameter (F) (mm)	Head Diameter (A) (mm)	Head Height (H) (mm)	Internal Nut Depth (mm)	Min Hole Dia On Fixture (mm)	Embedment Depth (mm)	Minimum Spacing (mm)	Max Fast Thickness (G) (mm)	Drill Hole Size (mm)	Spanner Size (AS) (mm)	sku (qfind)
	Nom	Nom	Nom	Nom	Nom	Nom	Nom	Nom	Nom	Nom	Nom	Nom			
M12	M12 x 1.75p	100	100	Full Thread	24.00	24.50	30.00	23.00	15	55.00	60	45.00	12.00	19	65SBCO12100G
M12	M12 x 1.75p	150	150	100	24.00	24.50	30.00	23.00	15	55.00	60	95.00	12.00	19	65SBCO12150G

Disclaimer:

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

* CAD drawings may not reflect diameter, thread length or overall length.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 18 Mar 2024