


## Wedge Anchor / Claw Bolt / Through Bolt

**Material:** Stainless Steel

**Class Grade:** A4-70 G316

**Material Finish:** Stainless A4-70 G316

**Corrosion Protection Level:** Ultimate

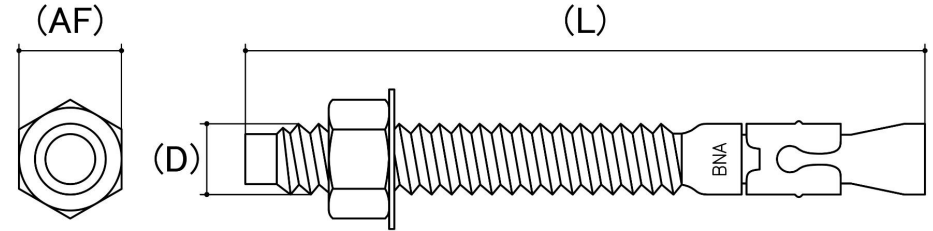

*CAD drawings shown for graphic representation only.\**

Size	Thread Size x Pitch	Length (mm)	Anchor Length (L) (mm)	Min Hole Dia On Fixture (mm)	Embedment Depth (mm)	Minimum Spacing (mm)	Min Base Material Thick (B) (mm)	Drill Hole Size (mm)	Spanner Size (AS) (mm)	sku (qfind)
	Nom	Nom	Nom	Nom	Nom	Nom	Nom	Nom		
M8	M8 x 1.25p	60	60	10	40.00	40	100.00	8.00	13	65TBS860M
M8	M8 x 1.25p	80	80	10	40.00	40	100.00	8.00	13	65TBS880M
M10	M10 x 1.50p	90	90	12	60.00	55	100.00	10.00	17	65TBS1090M
M10	M10 x 1.50p	120	120	12	60.00	55	100.00	10.00	17	65TBS10120M
M12	M12 x 1.75p	80	80	15	70.00	75	130.00	12.00	19	65TBS1280M
M12	M12 x 1.75p	100	100	15	70.00	75	130.00	12.00	19	65TBS12100M
M12	M12 x 1.75p	140	140	15	70.00	75	130.00	12.00	19	65TBS12140M
M16	M16 x 2.00p	105	105	20	80.00	100	170.00	16.00	24	65TBS16105M
M16	M16 x 2.00p	140	140	20	80.00	100	170.00	16.00	24	65TBS16140M
M20	M20 x 2.50p	125	125	24	90.00	110	200.00	20.00	30	65TBS20125M
M20	M20 x 2.50p	160	160	24	90.00	110	200.00	20.00	30	65TBS20160M

**Disclaimer:**

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

\* CAD drawings may not reflect diameter, thread length or overall length.