

Thin Lock Nut

Thread Type: Metric - Coarse


Thread Direction: Right Hand

Material: Stainless Steel

Class Grade: A2-70 G304

Corrosion Protection Level: Excellent

Standard: DIN 439

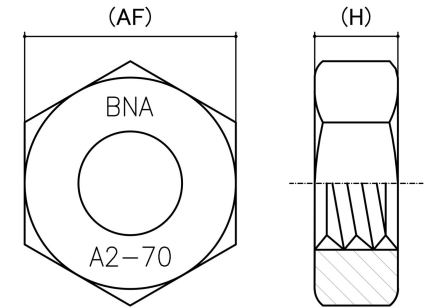

*CAD drawings shown for graphic representation only.**

| Size | Thread Pitch (mm) | Thread Type | Overall Nut Height (B) (mm) | | Across Flats (AF) (mm) | | Spanner Size (AF) (mm) | sku (qfind) |
|------|-------------------|-------------|-----------------------------|-------|------------------------|-------|------------------------|-------------|
| | | | Min | Max | Min | Max | | |
| M3 | 0.50 | Coarse | 1.55 | 1.75 | 5.32 | 5.50 | 5.5 | 41LS3 |
| M4 | 0.70 | Coarse | 1.95 | 2.20 | 6.78 | 7.00 | 7 | 41LS4 |
| M5 | 0.80 | Coarse | 2.45 | 2.70 | 7.78 | 8.00 | 8 | 41LS5 |
| M6 | 1.00 | Coarse | 2.90 | 3.20 | 9.78 | 10.00 | 10 | 41LS6 |
| M8 | 1.25 | Coarse | 3.70 | 4.00 | 12.73 | 13.00 | 13 | 41LS8 |
| M10 | 1.50 | Coarse | 4.70 | 5.00 | 16.73 | 17.00 | 17 | 41LS10 |
| M12 | 1.75 | Coarse | 5.70 | 6.00 | 18.67 | 19.00 | 19 | 41LS12 |
| M16 | 2.00 | Coarse | 7.42 | 8.00 | 23.67 | 24.00 | 24 | 41LS16 |
| M20 | 2.50 | Coarse | 9.10 | 10.00 | 29.16 | 30.00 | 30 | 41LS20 |
| M24 | 3.00 | Coarse | 10.90 | 12.00 | 35.16 | 36.00 | 36 | 41LS24 |

Disclaimer:

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

* CAD drawings may not reflect diameter, thread length or overall length.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 18 Mar 2024