

## Countersunk Head Nutsert

**Body Type:** Round Open

**Outside Body:** Smooth


**Thread Type:** Metric - Coarse

**Body Material:** Aluminum Alloy

**Class Grade:** Low Tensile Class 4.6

**Finish:** Chemically Brightened

**Corrosion Protection Level:** Ultimate

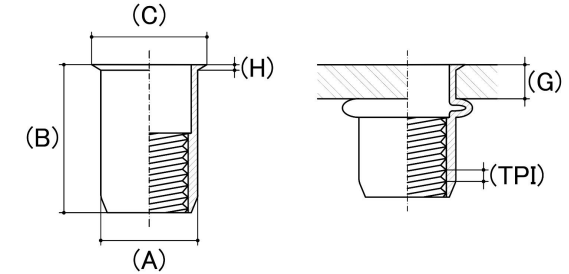

*CAD drawings shown for graphic representation only.\**

Size	Thread Pitch (mm)	Thread Type	Material Grip Range (G) (mm)		Overall Nut Height (B) (mm)	Head Diameter (C) (mm)	Nut Width (A) (mm)	Flange Thickness (H) (mm)	Recommended Hole Size (mm)	Pull Out (KN)	Push Out (KN)	Torque To Turn (NM)	sku (qfind)
			Min	Max	Nom	Nom	Nom	Nom	Nom	Nom	Nom	Nom	
M3	0.50	Coarse	0.50	1.50	9.00	6.00	4.95	0.50	5.00	1	0	2	43CA3SM
M4	0.70	Coarse	0.80	2.50	11.00	7.00	5.95	0.50	6.00	2	0	3	43CA4SP
M4	0.70	Coarse	2.50	3.50	12.00	7.00	5.95	0.50	6.00	2	0	3	43CA4SP2
M5	0.80	Coarse	0.80	2.50	12.00	8.00	6.95	0.50	7.00	4	1	6	43CA5SP
M5	0.80	Coarse	2.50	3.50	13.00	8.00	6.95	0.50	7.00	4	1	6	43CA5SP2
M6	1.00	Coarse	1.00	2.50	14.00	10.00	8.95	0.50	9.00	4	2	13	43CA6SP
M6	1.00	Coarse	2.50	4.00	15.50	10.00	8.95	0.50	9.00	4	2	13	43CA6SP2
M8	1.25	Coarse	1.00	2.50	15.50	12.00	10.95	0.70	11.00	10	3	25	43CA8SP
M8	1.25	Coarse	2.50	4.00	17.00	12.00	10.95	0.70	11.00	10	3	25	43CA8SP2
M10	1.50	Coarse	1.00	2.50	16.00	14.00	12.95	0.70	13.00	11	3	44	43CA10SP

**Disclaimer:**

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

\* CAD drawings may not reflect diameter, thread length or overall length.