

Spring Pin


Material: Hardened Carbon Steel

Class Grade: High Tensile

Finish: Black Oxide | Zinc Plated

Corrosion Protection Level: Limited

Standard: ISO 8752

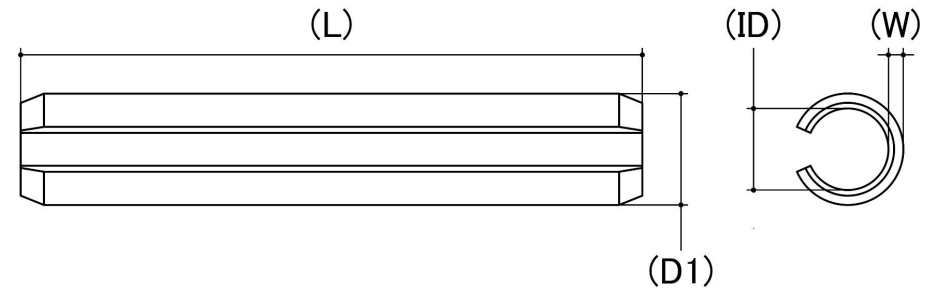

*CAD drawings shown for graphic representation only.**

Size	Pin Diameter (D) (mm)		Inside Dia. (ID) (mm)	Wall Thickness (W) (mm)	Chamfer Length (mm)		Double Shear Load (KN)	Hole Size To Suit (mm)		sku (qfind)
	Min	Max	Nom	Nom	Min	Max	Nom	Min	Max	
M1.5	1.70	1.80	1.10	0.30	0.20	0.30	1.580	1.50	1.60	37SP15
M3	3.30	3.50	2.20	0.60	0.50	0.70	6.320	3.00	3.10	37SP3P
M3.5	3.80	4.00	2.30	0.75	0.60	0.80	8.450	3.50	3.62	37SP35P
M4	4.40	4.60	2.90	0.80	0.65	0.85	11.240	4.00	4.12	37SP4P
M5	5.40	5.60	3.50	1.00	0.90	1.10	17.540	5.00	5.12	37SP5P
M6	6.40	6.70	4.20	1.20	1.20	1.40	26.040	6.00	6.12	37SP6P
M8	8.50	8.80	5.60	1.50	1.60	2.00	42.760	8.00	8.15	37SP8P
M10	10.50	10.80	6.70	2.00	2.00	2.40	70.160	10.00	10.15	37SP10P
M12	12.50	12.80	7.70	2.50	2.00	2.40	104.100	12.00	12.18	37SP12P

Disclaimer:

Dimensional data and technical information was obtained from publicly available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

* CAD drawings may not reflect diameter, thread length or overall length.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 18 Mar 2024