


Pop Blind Rivet

Head Style: Countersunk Head

Shell Material: Aluminium

Stem Material: Steel Zinc Plated

Corrosion Protection Level: Moderate

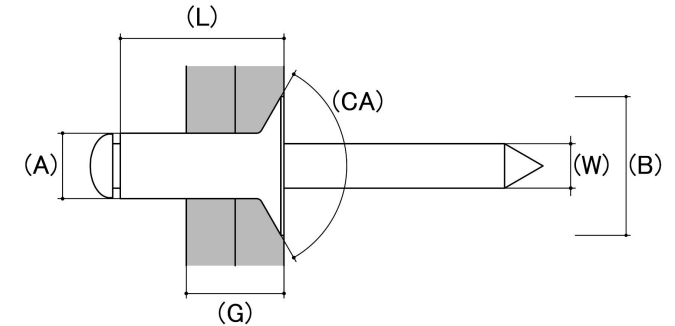

*CAD drawings shown for graphic representation only.**

Industry Rivet Code	Rivet Diameter (A) (mm)	Head Diameter (B) (mm)	Shell Length (L) (mm)	Material Grip Range (G) (mm)		Stem Diameter (W) (mm)		Hole Size (mm)	CSK Angle (CA)	sku (qfind)
	Nom	Nom	Nom	Min	Max	Min	Max	Nom	Nom	
72 AS 3-4	2.40 (3/32)	4.50	9.50	0.80	3.20	1.70	2.00	2.50	120°	72AS34
72 AS 4-2	3.20 (1/8)	6.00	6.40	0.80	3.20	1.70	2.00	3.30	120°	72AS42
72 AS 4-3	3.20 (1/8)	6.00	8.00	3.20	4.80	1.70	2.00	3.30	120°	72AS43
72 AS 4-4	3.20 (1/8)	6.00	10.00	4.80	6.40	1.70	2.00	3.30	120°	72AS44
72 AS 4-5	3.20 (1/8)	6.00	11.50	6.40	8.00	1.70	2.00	3.30	120°	72AS45
72 AS 4-6	3.20 (1/8)	6.00	12.70	8.00	9.60	1.70	2.00	3.30	120°	72AS46
72 AS 4-8	3.20 (1/8)	6.00	16.00	9.60	12.70	1.70	2.00	3.30	120°	72AS48
72 AS 4-10	3.20 (1/8)	6.00	19.00	12.70	16.00	1.70	2.00	3.30	120°	72AS410
72 AS 4-12	3.20 (1/8)	6.00	25.40	19.00	22.00	1.70	2.00	3.30	120°	72AS412
72 AS 5-2	4.00 (5/32)	7.60	8.00	0.80	3.20	2.10	2.50	4.10	120°	72AS52
72 AS 5-3	4.00 (5/32)	7.60	10.00	3.20	4.80	2.10	2.50	4.10	120°	72AS53
72 AS 5-4	4.00 (5/32)	7.60	11.40	4.80	6.40	2.10	2.50	4.10	120°	72AS54
72 AS 5-5	4.00 (5/32)	7.60	12.50	6.40	8.00	2.10	2.50	4.10	120°	72AS55
72 AS 5-6	4.00 (5/32)	7.60	14.50	8.00	9.60	2.10	2.50	4.10	120°	72AS56
72 AS 5-8	4.00 (5/32)	7.60	16.50	9.60	12.70	2.10	2.50	4.10	120°	72AS58

Industry Rivet Code	Rivet Diameter (A) (mm)	Head Diameter (B) (mm)	Shell Length (L) (mm)	Material Grip Range (G) (mm)		Stem Diameter (W) (mm)		Hole Size (mm)	CSK Angle (CA)	sku (qfind)
	Nom	Nom	Nom	Min	Max	Min	Max	Nom	Nom	
72 AS 5-10	4.00 (5/32)	7.60	20.00	12.70	16.00	2.10	2.50	4.10	120°	72AS510
72 AS 5-12	4.00 (5/32)	7.60	25.00	16.00	19.00	2.10	2.50	4.10	120°	72AS512
72 AS 6-2	4.80 (3/16)	9.20	8.00	0.80	3.20	2.50	2.90	4.90	120°	72AS62
72 AS 6-3	4.80 (3/16)	9.20	10.00	3.20	4.80	2.50	2.90	4.90	120°	72AS63
72 AS 6-4	4.80 (3/16)	9.20	11.40	4.80	6.40	2.50	2.90	4.90	120°	72AS64
72 AS 6-6	4.80 (3/16)	9.20	14.50	8.00	9.60	2.50	2.90	4.90	120°	72AS66
72 AS 6-8	4.80 (3/16)	9.20	17.50	9.60	12.70	2.50	2.90	4.90	120°	72AS68
72 AS 6-10	4.80 (3/16)	9.20	20.60	12.70	16.00	2.50	2.90	4.90	120°	72AS610
72 AS 6-12	4.80 (3/16)	9.20	25.40	16.00	19.00	2.50	2.90	4.90	120°	72AS612
72 AS 6-16	4.80 (3/16)	9.20	30.00	22.00	25.40	2.50	2.90	4.90	120°	72AS616

Disclaimer:

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

* CAD drawings may not reflect diameter, thread length or overall length.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 18 Mar 2024