


Pop Blind Rivet

Head Style: Dome Head

Shell Material: Aluminium

Stem Material: Steel Zinc Plated

Corrosion Protection Level: Moderate

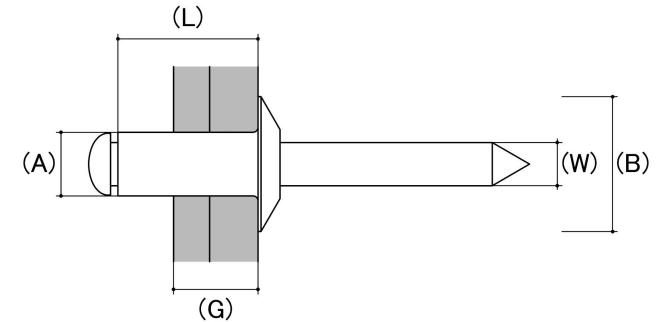

*CAD drawings shown for graphic representation only.**

Industry Rivet Code	Rivet Diameter (A) (mm)	Head Diameter (B) (mm)	Shell Length (L) (mm)	Material Grip Range (G) (mm)		Stem Diameter (W) (mm)		Hole Size (mm)	sku (qfind)
	Nom	Nom	Nom	Min	Max	Min	Max	Nom	
73 AS 3-2	2.40 (3/32)	4.60	6.40	0.50	3.20	1.20	1.40	2.50	73AS32
73 AS 3-3	2.40 (3/32)	4.60	7.50	3.20	4.80	1.20	1.40	2.50	73AS33
73 AS 3-4	2.40 (3/32)	4.60	9.50	4.80	6.40	1.20	1.40	2.50	73AS34
73 AS 4-1	3.20 (1/8)	6.20	4.80	0.80	1.60	1.70	2.00	3.30	73AS41
73 AS 4-2	3.20 (1/8)	6.20	6.40	1.60	3.20	1.70	2.00	3.30	73AS42
73 AS 4-3	3.20 (1/8)	6.20	8.00	3.20	4.80	1.70	2.00	3.30	73AS43
73 AS 4-4	3.20 (1/8)	6.20	10.00	4.80	6.40	1.70	2.00	3.30	73AS44
73 AS 4-5	3.20 (1/8)	6.20	11.40	6.40	8.00	1.70	2.00	3.30	73AS45
73 AS 4-6	3.20 (1/8)	6.20	12.70	8.00	9.60	1.70	2.00	3.30	73AS46
73 AS 4-8	3.20 (1/8)	6.20	16.00	9.60	12.70	1.70	2.00	3.30	73AS48
73 AS 4-10	3.20 (1/8)	6.20	19.00	12.70	16.00	1.70	2.00	3.30	73AS410
73 AS 4-12	3.20 (1/8)	6.20	22.90	19.00	22.00	1.70	2.00	3.30	73AS412
73 AS 5-1	4.00 (5/32)	7.65	5.80	0.80	1.60	2.10	2.50	4.10	73AS51
73 AS 5-2	4.00 (5/32)	7.65	8.00	1.60	3.20	2.10	2.50	4.10	73AS52
73 AS 5-3	4.00 (5/32)	7.65	10.00	3.20	4.80	2.10	2.50	4.10	73AS53

Industry Rivet Code	Rivet Diameter (A) (mm)	Head Diameter (B) (mm)	Shell Length (L) (mm)	Material Grip Range (G) (mm)		Stem Diameter (W) (mm)		Hole Size (mm)	sku (qfind)
	Nom	Nom	Nom	Min	Max	Min	Max	Nom	
73 AS 5-4	4.00 (5/32)	7.65	11.40	4.80	6.40	2.10	2.50	4.10	73AS54
73 AS 5-5	4.00 (5/32)	7.65	12.70	6.40	8.00	2.10	2.50	4.10	73AS55
73 AS 5-6	4.00 (5/32)	7.65	14.50	8.00	9.60	2.10	2.50	4.10	73AS56
73 AS 5-8	4.00 (5/32)	7.65	16.50	9.60	12.70	2.10	2.50	4.10	73AS58
73 AS 5-10	4.00 (5/32)	7.65	19.00	12.70	16.00	2.10	2.50	4.10	73AS510
73 AS 5-12	4.00 (5/32)	7.65	25.40	16.00	19.00	2.10	2.50	4.10	73AS512
73 AS 6-1	4.80 (3/16)	9.40	6.40	0.80	1.60	2.50	2.90	4.90	73AS61
73 AS 6-2	4.80 (3/16)	9.40	8.00	1.60	3.20	2.50	2.90	4.90	73AS62
73 AS 6-3	4.80 (3/16)	9.40	10.00	3.20	4.80	2.50	2.90	4.90	73AS63
73 AS 6-4	4.80 (3/16)	9.40	11.40	4.80	6.40	2.50	2.90	4.90	73AS64
73 AS 6-5	4.80 (3/16)	9.40	12.70	6.40	8.00	2.50	2.90	4.90	73AS65
73 AS 6-6	4.80 (3/16)	9.40	14.50	8.00	9.60	2.50	2.90	4.90	73AS66
73 AS 6-8	4.80 (3/16)	9.40	17.50	9.60	12.70	2.50	2.90	4.90	73AS68
73 AS 6-10	4.80 (3/16)	9.40	20.60	12.70	16.00	2.50	2.90	4.90	73AS610
73 AS 6-12	4.80 (3/16)	9.40	25.40	16.00	19.00	2.50	2.90	4.90	73AS612
73 AS 6-14	4.80 (3/16)	9.40	27.00	19.00	22.00	2.50	2.90	4.90	73AS614
73 AS 6-16	4.80 (3/16)	9.40	31.00	22.00	25.40	2.50	2.90	4.90	73AS616
73 AS 6-20	4.80 (3/16)	9.40	35.00	25.40	31.80	2.50	2.90	4.90	73AS620
73 AS 6-22	4.80 (3/16)	9.40	40.00	31.80	34.00	2.50	2.90	4.90	73AS622
73 AS 8-2	6.40 (1/4)	12.50	9.50	1.60	3.20	3.65	3.90	6.50	73AS82
73 AS 8-4	6.40 (1/4)	12.50	12.50	4.80	6.40	3.65	3.90	6.50	73AS84
73 AS 8-6	6.40 (1/4)	12.50	15.70	8.00	9.60	3.65	3.90	6.50	73AS86
73 AS 8-8	6.40 (1/4)	12.50	19.00	9.60	12.70	3.65	3.90	6.50	73AS88
73 AS 8-10	6.40 (1/4)	12.50	23.00	12.70	16.00	3.65	3.90	6.50	73AS810
73 AS 8-12	6.40 (1/4)	12.50	25.30	16.00	19.00	3.65	3.90	6.50	73AS812
73 AS 8-14	6.40 (1/4)	12.50	28.50	19.00	22.00	3.65	3.90	6.50	73AS814
73 AS 8-16	6.40 (1/4)	12.50	31.00	22.00	25.40	3.65	3.90	6.50	73AS816

Disclaimer:

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

* CAD drawings may not reflect diameter, thread length or overall length.