


Pop Blind Rivet

Head Style: Dome Head

Shell Material: Monel - Nickel Copper Alloy

Stem Material: Steel Zinc Plated

Corrosion Protection Level: Excellent

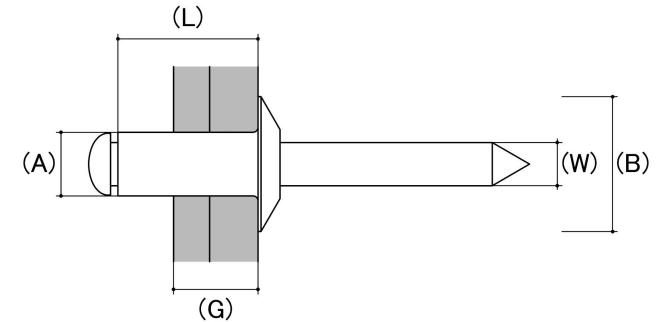

*CAD drawings shown for graphic representation only.**

| Industry Rivet Code | Rivet Diameter (A) (mm) | Head Diameter (B) (mm) | Shell Length (L) (mm) | Material Grip Range (G) (mm) | | Stem Diameter (W) (mm) | | Hole Size (mm) | sku (qfind) |
|---------------------|----------------------------|---------------------------|--------------------------|---------------------------------|------|---------------------------|------|-------------------|----------------|
| | Nom | Nom | Nom | Min | Max | Min | Max | Nom | |
| 73 MS 4-1 | 3.20 (1/8) | 6.30 | 5.00 | 0.80 | 1.60 | 1.70 | 2.00 | 3.30 | 73MS41 |
| 73 MS 4-2 | 3.20 (1/8) | 6.30 | 6.40 | 1.60 | 3.20 | 1.70 | 2.00 | 3.30 | 73MS42 |
| 73 MS 4-3 | 3.20 (1/8) | 6.30 | 8.00 | 3.20 | 4.80 | 1.70 | 2.00 | 3.30 | 73MS43 |
| 73 MS 4-4 | 3.20 (1/8) | 6.30 | 10.00 | 4.80 | 6.40 | 1.70 | 2.00 | 3.30 | 73MS44 |
| 73 MS 4-5 | 3.20 (1/8) | 6.30 | 11.40 | 6.40 | 8.00 | 1.70 | 2.00 | 3.30 | 73MS45 |
| 73 MS 4-6 | 3.20 (1/8) | 6.30 | 12.70 | 8.00 | 9.60 | 1.70 | 2.00 | 3.30 | 73MS46 |
| 73 MS 5-2 | 4.00 (5/32) | 7.65 | 8.00 | 0.80 | 3.20 | 2.10 | 2.50 | 4.10 | 73MS52 |
| 73 MS 5-3 | 4.00 (5/32) | 7.65 | 10.00 | 3.20 | 4.80 | 2.10 | 2.50 | 4.10 | 73MS53 |
| 73 MS 5-4 | 4.00 (5/32) | 7.65 | 11.40 | 4.80 | 6.40 | 2.10 | 2.50 | 4.10 | 73MS54 |
| 73 MS 5-5 | 4.00 (5/32) | 7.65 | 12.70 | 6.40 | 8.00 | 2.10 | 2.50 | 4.10 | 73MS55 |
| 73 MS 5-6 | 4.00 (5/32) | 7.65 | 14.50 | 8.00 | 9.60 | 2.10 | 2.50 | 4.10 | 73MS56 |
| 73 MS 6-2 | 4.80 (3/16) | 9.35 | 8.00 | 0.80 | 3.20 | 2.50 | 2.90 | 4.90 | 73MS62 |
| 73 MS 6-3 | 4.80 (3/16) | 9.35 | 10.00 | 3.20 | 4.80 | 2.50 | 2.90 | 4.90 | 73MS63 |
| 73 MS 6-4 | 4.80 (3/16) | 9.35 | 11.40 | 4.80 | 6.40 | 2.50 | 2.90 | 4.90 | 73MS64 |
| 73 MS 6-5 | 4.80 (3/16) | 9.35 | 12.70 | 6.40 | 8.00 | 2.50 | 2.90 | 4.90 | 73MS65 |

| Industry Rivet Code | Rivet Diameter (A) (mm) | Head Diameter (B) (mm) | Shell Length (L) (mm) | Material Grip Range (G) (mm) | | Stem Diameter (W) (mm) | | Hole Size (mm) | sku (qfind) |
|---------------------|----------------------------|---------------------------|--------------------------|---------------------------------|-------|---------------------------|------|-------------------|----------------|
| | Nom | Nom | Nom | Min | Max | Min | Max | Nom | |
| 73 MS 6-6 | 4.80 (3/16) | 9.35 | 14.50 | 8.00 | 9.60 | 2.50 | 2.90 | 4.90 | 73MS66 |
| 73 MS 6-8 | 4.80 (3/16) | 9.35 | 17.50 | 9.60 | 12.70 | 2.50 | 2.90 | 4.90 | 73MS68 |

Disclaimer:

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

* CAD drawings may not reflect diameter, thread length or overall length.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 18 Mar 2024