

Peeled Pop Blind Rivet

Head Style: Large Flange Head


Shell Material: Aluminium

Stem Material: Steel Zinc Plated

Corrosion Protection Level: Moderate

Standard: DIN7337

Comments: When selecting the right rivet, start with hole size and grip range.

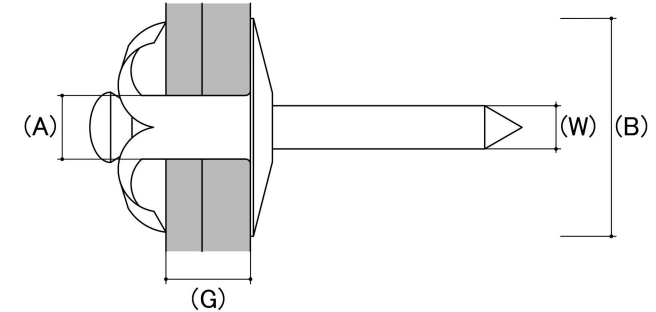

*Cad Drawings shown for graphic representation only.**

Industry Rivet Code	Rivet Diameter (A) (mm)	Head Diameter (B) (mm)		Shell Length (L) (mm)	Material Grip Range (G) (mm)		Stem Diameter (W) (mm)		Hole Size (mm)	Tensile	Shear	sku (Part Number)
		Min	Max	Nom	Min	Max	Min	Max		Nom	Nom	
73 ASPL 6-4	4.80 (3/16)	13.90	16.50	12.00	2.00	6.00	2.50	2.90	4.90	1700	1700	73ASPL64
73 ASPL 6-6	4.80 (3/16)	13.90	16.50	14.00	3.00	9.00	2.50	2.90	4.90	1700	1700	73ASPL66
73 ASPL 6-8	4.80 (3/16)	13.90	16.50	18.00	5.00	11.00	2.50	2.90	4.90	1700	1700	73ASPL68
73 ASPL 6-10	4.80 (3/16)	13.90	16.50	21.00	8.00	15.00	2.50	2.90	4.90	1700	1700	73ASPL610
73 ASPL 6-12	4.80 (3/16)	13.90	16.50	25.00	12.00	19.00	2.50	2.90	4.90	1700	1700	73ASPL612

Disclaimer:

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

* Cad Drawings may not reflect diameter, thread length or overall length.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 31 Oct 2024