


Anlock Mega Lock Structural Rivet

Head Style: Countersunk Head

Shell Material: Stainless G304

Stem Material: Stainless G304

Corrosion Protection Level: Excellent

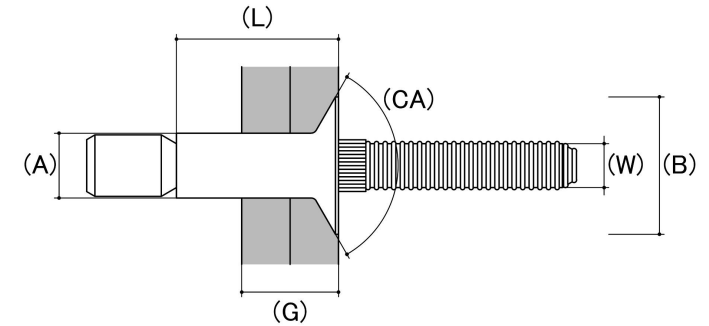

CAD drawings shown for graphic representation only.*

Industry Rivet Code	Rivet Diameter (A) (mm)	Head Diameter (B) (mm)	Shell Length (L) (mm)	Material Grip Range (G) (mm)		Stem Diameter (W) (mm)	Hole Size (mm)		CSK Angle (CA)	Tensile	Shear	Breaking Load	Retention Load	sku (qfind)
	Nom	Nom	Nom	Min	Max	Nom	Min	Max	Nom	Nom	Nom	Nom	Nom	
72 ANSTST 6-6	4.80 (3/16)	9.20	12.00	3.20	8.40	3.10	4.90	5.10	120°	4800	6000	6500	445	72ANSTST66
72 ANSTST 6-8	4.80 (3/16)	9.20	16.00	3.20	12.70	3.10	4.90	5.10	120°	4800	6000	6500	445	72ANSTST68
72 ANSTST 8-8	6.40 (1/4)	11.40	16.00	4.30	12.10	3.90	6.70	6.90	120°	8010	10500	12000	890	72ANSTST88
72 ANSTST 8-12	6.40 (1/4)	11.40	22.00	4.30	17.50	3.90	6.70	6.90	120°	8010	10500	12000	890	72ANSTST812

Disclaimer:

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

* CAD drawings may not reflect diameter, thread length or overall length.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 18 Mar 2024