


Anlock Mega Lock Structural Rivet

Head Style: Countersunk Head
Shell Material: Steel Zinc Plated
Stem Material: Steel Zinc Plated
Corrosion Protection Level: Moderate

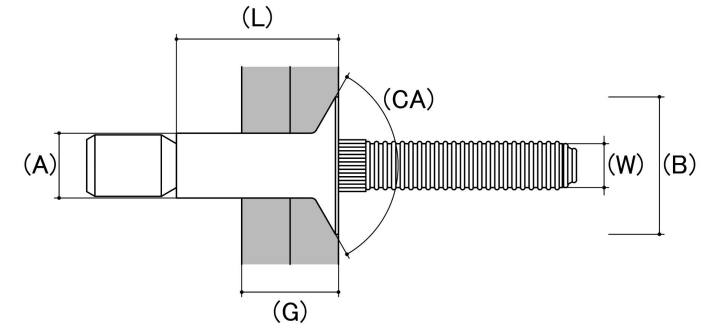

*CAD drawings shown for graphic representation only.**

Industry Rivet Code	Rivet Diameter (A) (mm)	Head Diameter (B) (mm)	Shell Length (L) (mm)	Material Grip Range (G) (mm)		Stem Diameter (W) (mm)	Hole Size (mm)		CSK Angle (CA)	Tensile	Shear	sku (qfind)
	Nom	Nom	Nom	Min	Max	Nom	Min	Max	Nom	Nom	Nom	
72 ANSS 6-6	4.80 (3/16)	9.20	12.00	3.20	8.40	3.10	4.90	5.10	120°	4000	5400	72ANSS66
72 ANSS 6-8	4.80 (3/16)	9.20	16.00	7.70	12.70	3.10	4.90	5.10	120°	4000	5400	72ANSS68
72 ANSS 8-8	6.40 (1/4)	11.40	16.00	4.30	12.10	4.10	6.70	6.90	120°	8200	10500	72ANSS88
72 ANSS 8-12	6.40 (1/4)	11.40	23.00	10.50	18.40	4.10	6.70	6.90	120°	8200	10500	72ANSS812

Disclaimer:

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

* CAD drawings may not reflect diameter, thread length or overall length.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 18 Mar 2024