

Decking Timber Screws

Head Style: Countersunk Head Ribbed

Drive Type: Square


Screw Point: Type 17 for Timber

Material: Stainless Steel

Class Grade: A4-70 G316

Corrosion Protection Level: Ultimate

Internal External: External

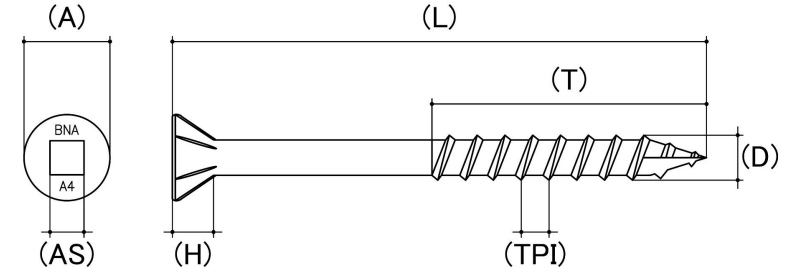

*Cad Drawings shown for graphic representation only.**

Size	Thread Pitch (TPI)	Thread Type	Product Diameter (D) (mm)		Head Diameter (A) (mm)		Head Height (H) (mm)		Embedment (mm)	Board Thickness (mm)	Driver Bit Size (AS)	sku (Part Number)
			Min	Max	Min	Max	Min	Max				
10g (4.80mm)	12 TPI	Coarse	4.65	4.80	8.90	9.20	4.40	4.60	25	25	SQ2	06CDS1012M
10g (4.80mm)	12 TPI	Coarse	4.65	4.80	8.90	9.20	4.40	4.60	20	25	SQ2	KIT06CDS101240ME
10g (4.80mm)	12 TPI	Coarse	4.65	4.80	8.90	9.20	4.40	4.60	20	25	SQ2	KIT06CDS101240MED
10g (4.80mm)	12 TPI	Coarse	4.65	4.80	8.90	9.20	4.40	4.60	25	25	SQ2	KIT06CDS101250ME
10g (4.80mm)	12 TPI	Coarse	4.65	4.80	8.90	9.20	4.40	4.60	25	25	SQ2	KIT06CDS101250MED

Disclaimer:

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

* Cad Drawings may not reflect diameter, thread length or overall length.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 21 Aug 2024