

## Decking Timber Screws

**Head Style:** Trim Head Ribbed

**Drive Type:** Square


**Screw Point:** Type 17 for Timber

**Material:** Stainless Steel

**Class Grade:** A2-70 G304

**Corrosion Protection Level:** Very Good

**Internal External:** External

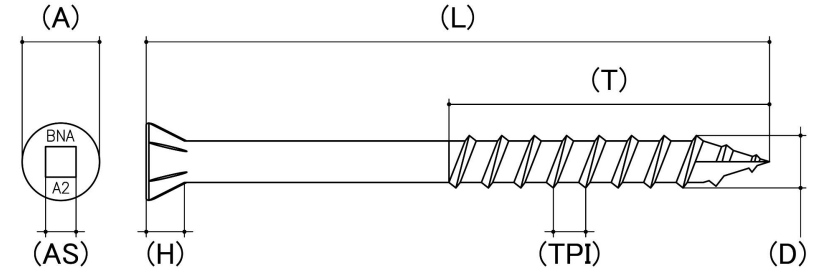

*Cad Drawings shown for graphic representation only.\**

Size	Thread Pitch (TPI)	Thread Type	Product Diameter (D) (mm)		Head Diameter (A) (mm)		Head Height (H) (mm)		Embedment (mm)	Board Thickness (mm)	Driver Bit Size (AS)	sku (Part Number)
			Min	Max	Min	Max	Min	Max				
8g (4.20mm)	10 TPI	Coarse	4.00	4.20	6.10	6.40	3.10	3.30	25	25	SQ1	KIT06CDST81050E
8g (4.20mm)	10 TPI	Coarse	4.00	4.20	6.10	6.40	3.10	3.30	25	25	SQ1	KIT06CDST81050ED
9g (4.50mm)	9 TPI	Coarse	4.40	4.60	6.45	6.60	3.60	3.80	25	25	SQ2	KIT06CDST9953E
9g (4.50mm)	9 TPI	Coarse	4.40	4.60	6.45	6.60	3.60	3.80	25	25	SQ2	KIT06CDST9953ED
10g (4.80mm)	12 TPI	Coarse	4.65	4.80	7.90	8.10	4.20	4.40	25	25	SQ2	KIT06CDST101250FGC
10g (4.80mm)	12 TPI	Coarse	4.65	4.80	7.90	8.10	4.20	4.40	25	25	SQ2	KIT06CDST101250FGCD
10g (4.80mm)	12 TPI	Coarse	4.65	4.80	7.90	8.10	4.20	4.40	25	25	SQ2	KIT06CDST101265FGC
10g (4.80mm)	12 TPI	Coarse	4.65	4.80	7.90	8.10	4.20	4.40	25	25	SQ2	KIT06CDST101265FGCD

**Disclaimer:**

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

\* Cad Drawings may not reflect diameter, thread length or overall length.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 21 Aug 2024