

Self Drilling Metal Screw

Head Style: Countersunk Head Ribbed


Drive Type: Phillips

Material: Hardened Steel

Class Grade: Class 3 / 4 / B8

Finish: Galvanised

Corrosion Protection Level: Excellent

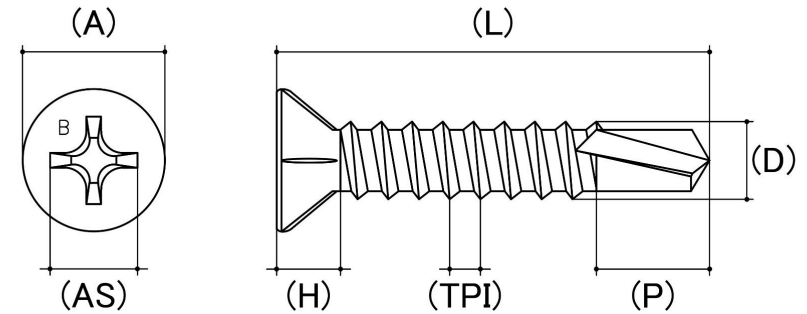

*CAD drawings shown for graphic representation only.**

| Size | Thread Pitch (TPI) | Thread Type | Product Diameter (D) (mm) | | Head Diameter (A) (mm) | | Head Height (H) (mm) | Drill Point Length (P) (mm) | Min To Max Steel Thickness (mm) | | Driver Bit Size (AS) | sku (qfind) |
|-------------|--------------------|-------------|---------------------------|------|------------------------|------|----------------------|-----------------------------|---------------------------------|------|----------------------|-------------|
| | | | Min | Max | Min | Max | Nom | Nom | Min | Max | Nom | |
| 8g (4.20mm) | 18 | Coarse | 4.00 | 4.20 | 7.70 | 8.10 | 3.45 | 7.00 | 0.75 | 2.50 | PH2 | 08CR81830C3 |

Disclaimer:

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

* CAD drawings may not reflect diameter, thread length or overall length.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 18 Mar 2024