

Chipboard Timber Screw

Head Style: Countersunk Head Ribbed

Drive Type: Square

Suitable For: Treated Pine

Screw Point: AB Standard


Material: Hardened Steel

Class Grade: Class 3 / 4

Finish: Galvanised

Corrosion Protection Level: Excellent

Internal External: External

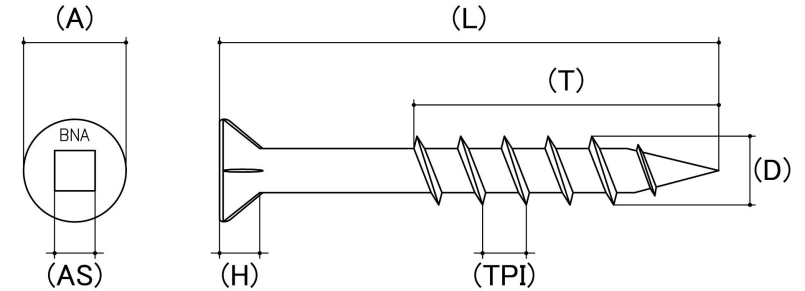

*Cad Drawings shown for graphic representation only.**

| Size | Thread Pitch (TPI) | Thread Type | Product Diameter (D) (mm) | | Head Diameter (A) (mm) | | Head Height (H) (mm) | | Driver Bit Size (AS) | sku (Part Number) |
|--------------|--------------------|-------------|---------------------------|------|------------------------|------|----------------------|------|----------------------|-------------------|
| | | | Min | Max | Min | Max | Min | Max | | |
| 8g (4.20mm) | 9 TPI | Coarse | 4.00 | 4.20 | 7.80 | 8.10 | 3.60 | 3.80 | SQ2 | 07CBSQ820C4 |
| 10g (4.80mm) | 8 TPI | Coarse | 4.65 | 4.80 | 8.80 | 9.20 | 4.40 | 4.60 | SQ2 | 07CBSQC4 |

Disclaimer:

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

* Cad Drawings may not reflect diameter, thread length or overall length.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 21 Aug 2024