

## Wood Screw

**Head Style:** Countersunk Head

**Drive Type:** Slot


**Screw Point:** AB Standard

**Material:** Solid Brass

**Class Grade:** Low Tensile Class 4.6

**Corrosion Protection Level:** Ultimate

**Internal External:** External

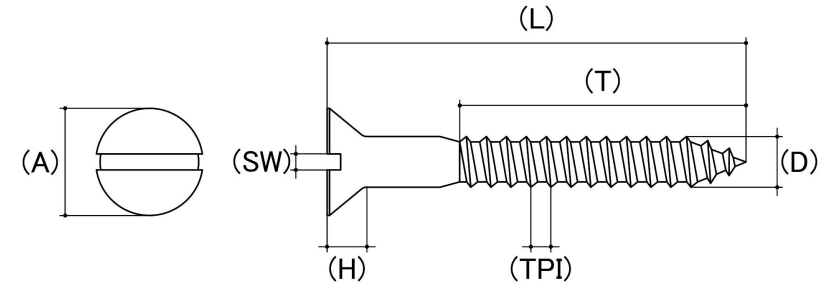

Cad Drawings shown for graphic representation only.\*

Size	Thread Pitch (TPI)	Thread Type	Product Diameter (D) (mm)		Head Diameter (A) (mm)		Head Height (H) (mm)	sku (Part Number)
			Min	Max	Min	Max	Nom	
2g (2.20mm)	26 TPI	Coarse	2.08	2.24	3.70	4.30	1.30	07CSLB2
3g (2.50mm)	24 TPI	Coarse	2.30	2.50	4.30	4.80	1.50	07CSLB3
4g (2.90mm)	22 TPI	Coarse	2.74	2.90	5.00	5.50	1.70	07CSLB4
6g (3.50mm)	18 TPI	Coarse	3.40	3.50	6.30	7.00	2.10	07CSLB6
8g (4.20mm)	15 TPI	Coarse	4.00	4.20	7.40	8.10	2.50	07CSLB8
10g (4.80mm)	13 TPI	Coarse	4.65	4.80	8.70	9.50	2.90	07CSLB10
12g (5.50mm)	11 TPI	Coarse	5.30	5.40	9.80	10.90	3.40	07CSLB12

**Disclaimer:**

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

\* Cad Drawings may not reflect diameter, thread length or overall length.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 21 Aug 2024