

Stitching Needle Point Timber Screw

Head Style: Hex Flange Head

Drive Type: Hex / Slotted

Screw Point: Needle Point


Material: Hardened Steel

Class Grade: Class 3 / 4

Finish: Galvanised

Corrosion Protection Level: Excellent

Internal External: External

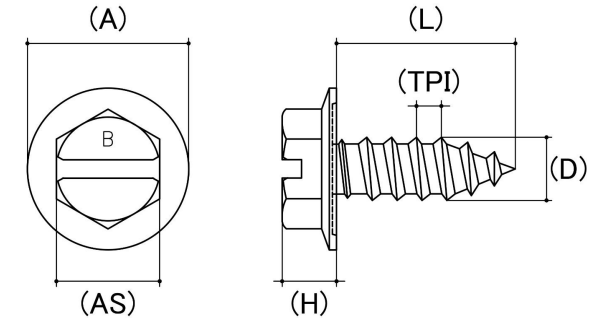

*Cad Drawings shown for graphic representation only.**

Size	Thread Pitch (TPI)	Thread Type	Product Diameter (D) (mm)		Head Diameter (A) (mm)		Head Height (H) (mm)	Single Shear (kN)	Axial Tensile (kN)	Torsional (Nm)	Driver Bit Size (AS) (inches)	sku (Part Number)
			Min	Max	Min	Max	Nom	Nom	Nom	Nom		
8g (4.20mm)	15 TPI	Coarse	4.00	4.20	9.90	10.20	4.10	4.100	8.700	5.900	1/4	07STHSL81515C3
8g (4.20mm)	15 TPI	Coarse	4.00	4.20	9.90	10.20	4.10	4.100	8.700	5.900	1/4	07STHSLSC3N

Disclaimer:

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

* Cad Drawings may not reflect diameter, thread length or overall length.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 21 Aug 2024