

Self Tapping Screw

Head Style: Countersunk Head

Drive Type: Phillips


Class Grade: Hardened Steel

Finish: Black Zinc

Material: Hardened Steel

Corrosion Protection Level: Moderate

Standard: AB ANSI B18.6.4

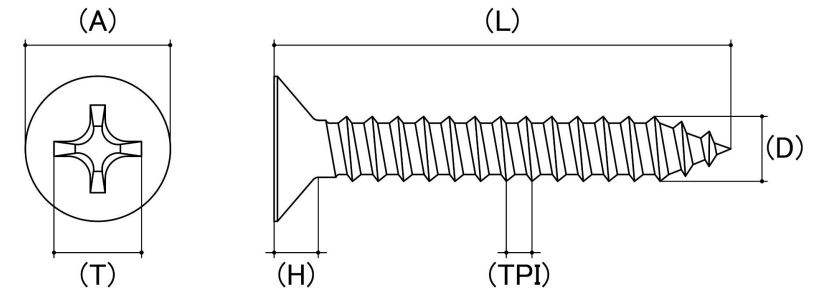

*CAD drawings shown for graphic representation only.**

Size	Thread Pitch (TPI)	Product Diameter (D) (mm)		Head Diameter (A) (mm)		Head Height (H) (mm)		Driver Bit Size (AS)	sku (qfind)
		Min	Max	Min	Max	Min	Max	Nom	
4g (2.90mm)	24	2.74	2.90	5.26	5.72	1.45	1.71	PH1	01C4BZ
6g (3.50mm)	20	3.35	3.53	6.53	7.09	1.76	2.11	PH2	01C6BZ
8g (4.20mm)	18	4.04	4.22	7.83	8.39	2.14	2.54	PH2	01C8BZ
10g (4.80mm)	16	4.62	4.80	9.12	9.66	2.57	2.95	PH3	01C10BZ
12g (5.50mm)	14	5.28	5.46	10.42	10.93	2.85	3.36	PH3	01C12BZ
14g (6.30mm)	14	6.02	6.30	12.12	12.88	3.43	3.89	PH3	01C14BZ

Disclaimer:

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

* CAD drawings may not reflect diameter, thread length or overall length.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 18 Mar 2024