

## Self Tapping Screw

**Head Style:** Countersunk Head


**Drive Type:** Phillips

**Class Grade:** A2-70 G304

**Material:** Stainless Steel

**Corrosion Protection Level:** Excellent

**Standard:** AB ANSI B18.6.4 / DIN 7982C / ISO 7050

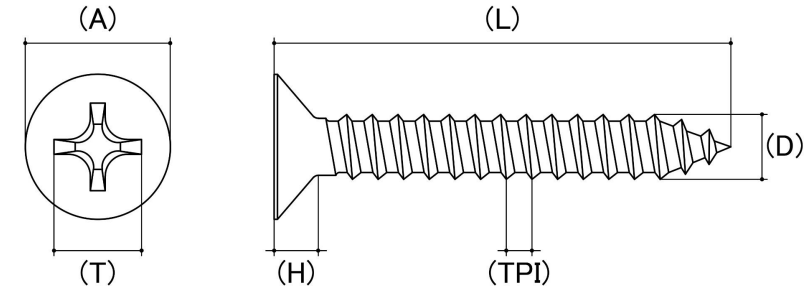

*CAD drawings shown for graphic representation only.\**

Size	Thread Pitch (TPI)	Product Diameter (D) (mm)		Head Diameter (A) (mm)		Head Height (H) (mm)		Driver Bit Size (AS)	sku (qfind)
		Min	Max	Min	Max	Min	Max	Nom	
2g (2.20mm)	32	2.08	2.24	3.65	4.11	1.02	1.30	PH1	01CS2
4g (2.90mm)	24	2.74	2.90	4.85	5.38	1.45	1.71	PH1	01CS4
6g (3.50mm)	20	3.35	3.53	6.05	6.66	1.76	2.11	PH2	01CS6
8g (4.20mm)	18	4.04	4.22	7.24	7.93	2.14	2.54	PH2	01CS8
10g (4.80mm)	16	4.62	4.80	8.46	9.20	2.49	2.95	PH2	01CS10
12g (5.50mm)	14	5.28	5.46	9.71	10.47	2.85	3.36	PH3	01CS12
14g (6.30mm)	14	6.02	6.30	10.85	11.74	3.21	3.76	PH3	01CS14

**Disclaimer:**

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

\* CAD drawings may not reflect diameter, thread length or overall length.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 18 Mar 2024