

Self Tapping Screw

Head Style: Countersunk Head


Drive Type: Phillips

Class Grade: A4-70 G316

Material: Stainless Steel

Corrosion Protection Level: Ultimate

Standard: AB ANSI B18.6.4 / DIN 7982C / ISO 7050

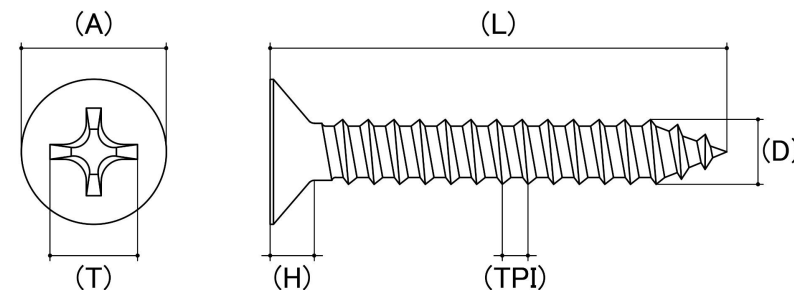

*Cad Drawings shown for graphic representation only.**

Size	Thread Pitch (TPI)	Product Diameter (D) (mm)		Head Diameter (A) (mm)		Head Height (H) (mm)		Driver Bit Size (AS)	sku (Part Number)
		Min	Max	Min	Max	Min	Max		
4g (2.90mm)	24 TPI	2.74	2.90	4.85	5.38	1.45	1.71	PH1	01CS4M
6g (3.50mm)	20 TPI	3.35	3.53	6.05	6.66	1.76	2.11	PH2	01CS6M
8g (4.20mm)	18 TPI	4.04	4.22	7.24	7.93	2.14	2.54	PH2	01CS8M
10g (4.80mm)	16 TPI	4.62	4.80	8.46	9.20	2.49	2.95	PH2	01CS10M
12g (5.50mm)	14 TPI	5.28	5.46	9.71	10.47	2.85	3.36	PH3	01CS12M
14g (6.30mm)	14 TPI	6.02	6.30	10.85	11.74	3.21	3.76	PH3	01CS14M

Disclaimer:

Dimensional data and technical information was obtained from publicly available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data.

Contact the relevant standard authorities for accurate and detailed information.

* Cad Drawings may not reflect diameter, thread length or overall length.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 04 Apr 2025